




## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6 : <b>G01N 33/543</b>		<b>A2</b>	(11) International Publication Number: <b>WO 97/04314</b>
			(43) International Publication Date: 6 February 1997 (06.02.97)
(21) International Application Number: <b>PCT/IL96/00049</b>		(81) Designated States: AL, AM, AT, AU, AZ, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, US, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).	
(22) International Filing Date: 16 July 1996 (16.07.96)		<p><b>Published</b> Without international search report and to be republished upon receipt of that report.</p> <p style="text-align: center;"><b>AI</b></p>	
(30) Priority Data: 114692 21 July 1995 (21.07.95) <b>IL</b>			
(71) Applicant (for all designated States except US): YISSUM RESEARCH DEVELOPMENT COMPANY OF THE HEBREW UNIVERSITY OF JERUSALEM [IL/IL]; 46 Jabotinsky Street, 92182 Jerusalem (IL).			
(72) Inventors; and (75) Inventors/Applicants (for US only): WILLNER, Itamar [IL/IL]; 12 HaShalom Street, 90805 Mevasseret Zion (IL). LEVI, Shlomo [IL/IL]; 128 HaPalmach Street, 90805 Mevasseret Zion (IL). COHEN, Yael [IL/IL]; 128 HaPalmach Street, 90805 Mevasseret Zion (IL). KATZ, Eugenii [IL/IL]; Neve Yaakov 713/38, 97350 Jerusalem (IL). DAGAN, Arie [IL/IL]; 13 Harlap Street, 92341 Jerusalem (IL).			
(74) Agent: COHN, Ilan; Reinhold Cohn and Partners, P.O. Box 4060, 61040 Tel Aviv (IL).			

(54) Title: DETERMINATION OF AN ANALYTE IN A LIQUID MEDIUM

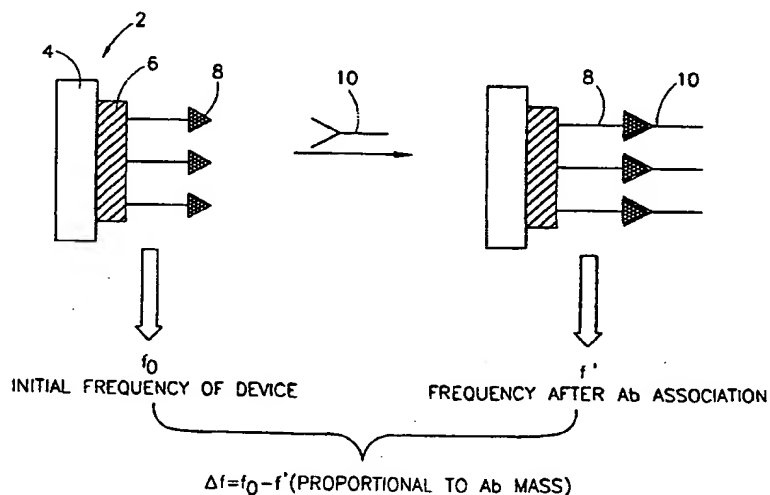

## (57) Abstract

Binding between two members of a recognition pair, e.g. antigen-antibody is determined by utilizing a probe comprising a piezoelectric crystal with electrodes on two opposite faces of the crystal. The crystal carries one or more metal plates which may be the same or different than said electrodes, the metal plates having immobilized thereon a first member of a recognition pair. Binding of a second member of the recognition pair to the first member, or dissociation between the two members and release of the second member from the probe, causes a change of immobilized mass which results in a change to the probe's resonance frequency. Said immobilized members may be immobilized on the surface of said metal plates by means of a linking group, having the following general (I):  $Z-R^1-Q$  wherein Z represents a sulphur-containing moiety which is capable of chemical association with, attachment to or chemisorption onto said metal,  $R^1$  represents a connecting group; Q is a functional group which is capable of forming a covalent bond with a moiety of said first member of the recognition pair. The immobilized member may have or be linked to an isomerizable group which changes its isomerization state as a result of exposure to energy.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

## DETERMINATION OF AN ANALYTE IN A LIQUID MEDIUM

### FIELD OF THE INVENTION

The invention is generally in the field of biosensors, and concerns a sensor useful for the administration of the presence, and optionally also concentration, of an analyte in a liquid, particularly aqueous, medium. The present invention relates to such electrodes, as well as their use and systems comprising them.

### PRIOR ART

In the following description, reference will be made to several prior art documents shown in the list of references below. The reference will be made by indicating their number from this list.

### References

1. E. Engvall, in: *Methods in Enzymology*, Vol. 70, 1980, pp. 419-439.
2. A. Shons, F. Dorman, J. Najarian, *J. Biomed. Mater. Res.* **6**, 565 (1972).
3. A.A. Suleiman and G.G. Guilbault, *Analyst*, **119**, 2279 (1994).
4. M.D. Ward and D.A. Buttry, *Science*, **249**, 1000 (1990).
5. J.R. Oliveria and S.F. Silver, U.S. Patent 4,242,096 (1980).
6. T.K. Rice, U.S. Patent 4,236,893 (1980).
7. T.K. Rice, U.S. Patent 4,314,821 (1982).

8. J.E. Roederer, G.J. Bastiaans, *Anal. Chem.*, **55**, 2333 (1983).
9. J.E. Roederer and G.J. Bastiaans, U.S. Patent 4,735,906 (1988).
- 5 10. H. Muramatsu, J.M. Dicks, E. Tamiya and I. Karube, *Anal. Chem.*, **59**, 2760 (1987).
11. D. Mueller-Schulte and H. Laurs, CA. 1990, 112(7), 51807 g.
- 10 12. H. Muramatsu, K. Kajiwara, E. Tamiya and I. Karube, *Anal. Chim. Acta*, **188**, 257 (1986).
13. H. Muramatsu, Y., Watanabe, M. Hikuma, T. Ataka, I. Kubo, E. Tamiya and I. Karube, *Anal. Lett.*, **22**, 2155 (1989).
- 15 14. B. Konig and M. Grätzel, *Anal. Lett.*, **26**, 1567 (1993).

Mention of the above references in this writing does not mean to imply that these references are in any way relevant to the issue of patentability of the invention as defined in the appended claims.

## BACKGROUND OF THE INVENTION

The specificity of antigen-antibody binding interactions and the technological progress in eliciting monoclonal antibodies for low molecular weight materials provide the grounds to design sensitive immunosensor devices for clinical diagnostics, food control and environmentally polluting substances. The most extensively developed immunosensor analyses include radioisotopic antigen/Ab labels and enzyme-linked immunosorbant assays (ELISA)<sup>(1)</sup>.

The discovery of a linear relationship between the change in the oscillating frequency of a piezoelectric crystal and the mass variation on the crystal as a result of binding or adsorption phenomena opened the possibilities to monitor gravimetrically antigen-antibody binding phenomena. The mathematical relation between the

frequency changes of a piezoelectric crystal,  $\Delta f$ , and mass changes,  $\Delta m$ , on the crystal is given by the following Sauerbrey equation:

$$\Delta f = -2.3 \times 10^6 f_0^2 \cdot \Delta m / A$$

5

where  $f_0$  is the fundamental resonance frequency of the crystal prior to the mass variation and  $A$  is the surface area of deposited mass. For example, for a crystal exhibiting a fundamental frequency of 9 MHz and surface area of 1 cm<sup>2</sup>, a mass-change on the crystal that  
10 corresponds to 1x10<sup>-9</sup> g will stimulate a frequency change,  $\Delta f$ , of 6 Hz.

The first analytical use of piezoelectric crystals in relation to antigen-antibody (Ag-Ab) interactions was reported in 1972<sup>(2)</sup>, where a nyabar precoated crystal was further coated via hydrophobic  
15 interactions, with bovine serum albumin (BSA) and the association of the BSA-Ab to the crystal was monitored by the frequency changes. Since then, the piezoelectric detection of antigens and antibodies by piezoelectric means or the quartz crystal microbalance (QCM) has been adopted in a series of analytical studies. The  
20 progress in this area has been reviewed by Suleiman *et al.*, 1994<sup>(3)</sup> and Ward *et al.*, 1990<sup>(4)</sup>.

Several patents describe the application of QCM for the analysis of antigens and antibodies. Physical adsorption of antigens to a crystal was used as a means for the detection of antigens by  
25 interacting the crystal with a mixture of the analyte antigen and a predetermined amount of Ab<sup>(5)</sup>. The decrease in the antigen concentration was inversely related to the antigen concentration in the sample. In two patents by Rice<sup>(6,7)</sup>, methods for the determination of Abs by QCM were disclosed. The antigen was immobilized on a

polymer precoated crystal and the frequency changes as a result of Ab association related to the analyte Ab concentration in the sample. By this method, human IgG against honey bee venom, phospholipase A, and keyhole limpet hemocyanine were analyzed<sup>(6)</sup>. However, non-specific binding to the crystal interfered with the analyses. In a follow-up patent<sup>(7)</sup>, the detection of low molecular weight components by a pre-coated crystal with the anti-Ab and competitive binding assay of the Ab-low molecular weight analyte was described. All of these analyses were performed by treatment of the crystals in solution and subsequent frequency measurements in air. This two-step solution/gas procedure allows improvement of the sensitivity of the resonating QCM, but introduces technical complications and the interference of hydration/dehydration phenomena that are reflected in the frequency parameters.

Piezoelectric immunoassaying in the liquid phase has important technical advantages as it allows stationary and flow analysis of aqueous samples. The method suffers, however, from a basic physical limitation due to substantially lower frequency changes of the crystal as a result of the solution viscosity. QCM immunoassays in solution were reported by Roederer<sup>(8)</sup> and addressed in a follow-up patent<sup>(9)</sup>. The quartz crystal was modified with glycidoxypyriltrimethoxy silane (GOPS), and the surface-modified crystal was then further modified by anti-human IgG antibody and then applied for the piezoelectric detection of human IgG. The detection limit of the device was determined to be  $13 \mu\text{g}\cdot\text{ml}^{-1}$ . A closely related approach was adopted by Muramatsu *et al.*<sup>(10)</sup> where the quartz crystals were surface-modified by  $\gamma$ -aminopropyl triethoxy silane and further derivatized by protein A. The surface-modified crystals were then applied for the determination of human

IgG in the concentration range  $10^{-6}$ – $10^{-2}$  mg·ml<sup>-1</sup>. A related patent disclosed the piezoelectric analysis of thyroxine using a polyamide 6 polymer coating and anti-thyroxine Ab as sensing interface<sup>(11)</sup>.

Piezoelectric analysis of high molecular weight antigens  
5 such as microbial cells was addressed using antibody-coated quartz crystals. *C. albicans* cells in the concentration range  $1 \times 10^6$ – $5 \times 10^8$  cells·ml<sup>-1</sup> were analyzed by an anti-*Candida albicans* Ab surface (12), *E. coli* with an anti-*E. coli* interface<sup>(13)</sup> and protein A-coated crystals acted as piezoelectric sensing interface for various bacteria  
10 including *Salmonella*, *Shigella*, *Yersinia* and *E. Coli*<sup>(14)</sup>.

Methods utilizing piezoelectric devices allow immuno-chemical sensing of interactions between two members of a recognition pair such as Ab-Ag, sugar-lectin, biotin-avidin, etc., without the need for labeling, and provide competitive analytical tools to  
15 conventional radio-labeled and enzyme-labeled analyses.

## GENERAL DESCRIPTION OF THE INVENTION

It is an object of the present invention to provide a method for determining the presence and optionally the concentration of  
20 analyte in a liquid medium, analyte being a member of a recognition pair.

It is further an object, in accordance with an embodiment of the present invention, to provide a system for carrying out the above method.

25 It is furthermore an object of the present invention to provide electrodes for use in the above system and method.

It is still further an object of the present invention to provide a process for the preparation of such electrodes.

The present invention makes use of a piezoelectric crystal and determining a change in mass bound to the crystal by measuring a change of its resonance frequency. In the following, the term " $\Delta f$  response" will be used to denote a change of frequency of the electrode as the result of binding of a mass thereto or release of a mass therefrom.

In accordance with the present invention, a novel system and an electrode for use in the system are provided. The system in accordance with the present invention is capable, by means of a  $\Delta f$  response, to determine the presence and optionally the concentration of an analyte in a liquid medium. The analyte is a member of a pair of molecules or complexes of molecules, which can specifically bind to one another in a non-covalent manner. Such a pair of molecules will be referred to herein as "*recognition pair*". The recognition pair may consist for example of antigen-antibody, ligand-receptor, sugar-lectin, biotin-avidin, enzyme-substrate, oligonucleotide-oligonucleotide with a complementary sequence, oligonucleotide-protein, oligonucleotide-cell, etc.

In the following description the terms "*determination*" or "*determine*" will be used to denote both qualitative and quantitative determination of binding. Where, for example, the method and system defined below are used for determining an analyte in a liquid medium, this is meant to denote determining the presence of an analyte in the medium and optionally its concentration. In other words, a  $\Delta f$  response will be used as a qualitative measure for the presence of the analyte in a medium; the extent of the  $\Delta f$  response will be used as a measure of the amount of analyte in a tested medium.



The term "*analyte*" already used above and which will be used further below, is meant to denote an unknown agent determined in a liquid medium.

5 The present invention has several aspects. One such aspect concerns a system for determining binding between two members of a recognition pair ("*system aspect*"); another such aspect relates to a method for determining such binding, which may be used for testing an analyte in a medium ("*method aspect*"); a further aspect is concerned with probes for use in the above system and method  
10 ("*probe aspect*"); and a further aspect is concerned with a process for the preparation of such a probe ("*process aspect*").

In accordance with the system aspect of the present invention, there is provided a system for determining binding between two members of a recognition pair, comprising:

- 15 (a) a probe comprising a piezoelectric crystal, electrodes on two opposite faces of the crystal, and one or more metal plates carried on the surface of said crystal, said metal plates being the same or different than said electrodes, the metal plates having immobilized thereon a first member of a recognition pair,  
20 binding of a second member of the recognition pair to the first member, or dissociation between the two members and release of the second member from the probe, causing a change of mass resulting in a change to the probe's resonance frequency;
- 25 (b) a vessel for holding a liquid, the probe being immersed in the liquid to allow either
- binding between the first, immobilized member and the second member dissolved in the liquid, or
  - release of the second member, *a priori* bound to said first member, into said liquid; and

- (c) electric or electronic circuitry for generating an alternating electric field between said electrodes, and measuring of the resonance frequency of said crystal.

5 In accordance with an embodiment of the method aspect of the invention, there is provided a method for determining binding between a first member of a recognition pair and a second member of a recognition pair, the second member being *a priori* contained in a liquid medium, comprising:

- 10 (a) providing a probe comprising a piezoelectric crystal, electrodes on two opposite faces of the crystal, and comprising one or more metal plates carried on the surface of said crystal, said plates being the same or different than said electrodes, the first member of the recognition pair being immobilized on the said plates;
- 15 (b) measuring an initial resonance frequency of the probe;
- (c) contacting said probe with a liquid medium containing said second member for a time sufficient to allow binding between the two members; and
- 20 (d) measuring a second resonance frequency, a lower second resonance frequency as compared to the initial resonance frequency indicating the presence of said second member in the liquid medium.

25 In accordance with another embodiment of the method aspect, there is provided a method for determining an analyte in a liquid medium, comprising:

- (a) providing a probe comprising a piezoelectric crystal, electrodes on two opposite faces of the probe, and comprising one or more metal plates carried on the surface of said crystal, said metal plates being the same or different than said electrodes, the metal

- plates having immobilized thereon a first member of a recognition pair, the second member of said pair being non-covalently bound to said first member; said second member being capable of binding to said analyte, the binding between said second member and said analyte being competitive to the binding of said second member to said immobilized member;
- 5
- (b) measuring an initial resonance frequency of the probe;
- (c) contacting said probe with said liquid medium under conditions and for a time such that in the presence of said analyte, at least
- 10 some of said second member will be released from the electrode and bind to said analyte; and
- (d) measuring a second resonance frequency, a higher second resonance frequency as compared to the initial resonance frequency indicating the presence of said analyte in said
- 15 medium.

In accordance with a further embodiment of the method aspect, there is provided a method for determining an analyte in a liquid medium, comprising:

- 20 (a) providing a probe comprising a piezoelectric crystal, electrodes on two opposite faces of the crystal, and comprising one or more metal plates carried on the surface of said crystal, said metal plates being the same or different than said electrodes, said metal plates having immobilized thereon a first member of a recognition pair; the pair comprising a second member being
- 25 capable of binding to said analyte, the binding between said second member and said analyte being competitive to the binding of said second member to said immobilized member;
- (b) measuring an initial resonance frequency of the probe;

- (c) mixing said liquid medium with a solution containing said second member, the presence of said analyte in the medium causing binding thereto of said second member;
- 5 (d) contacting the mixture obtained in step (c) with said probe for a time sufficient to allow binding of said second member to the immobilized first member; and
- 10 (e) measuring a second resonance frequency of the probe, a second resonance frequency lower than the initial frequency indicating presence of said analyte in the liquid medium (a relatively large decrease in resonance frequency meaning no or a small amount of analyte in the liquid medium; no or a small decrease in resonance frequency meaning a relatively large amount of the analyte in the liquid medium).

15 In accordance with the probe aspect of the invention there is provided a probe for use in the above method and system. The probe comprises a piezoelectric crystal having electrodes on two opposite faces of the crystal, and one or more metal plates carried on the surface of said crystal, said metal plates being the same or different than said electrodes, the metal plates having immobilized

20 thereon a first member of a recognition pair.

In order to cause a piezoelectric crystal to vibrate and eventually reach resonance frequency, the piezoelectric crystal has to be subjected to an alternating electrical field. The piezoelectric crystal used in accordance with the invention is typically a planar

25 crystal having the form of a plate or a disc, and the electrodes which provide the alternating electrical field are typically planar metal electrodes attached to opposite faces of the crystal. The plates with the immobilized member of a recognition pair are preferably the same as the planar electrodes, in other words the electrodes serve

both for the provision of an alternate electrical field and for immobilization of said first member.

An embodiment in accordance with the present invention where the analyte is measured directly by binding to the first member  
5 immobilized on the probe, will be referred to herein as "*direct embodiment*". A direct embodiment is an embodiment where the analyte to be determined is the second member of the recognition pair. An embodiment in accordance with the invention, such as the second and third embodiments defined above, where the presence of  
10 analyte is measured indirectly, i.e. what is measured in essence is the depletion of the second member, will be referred to herein as the "*indirect embodiment*".

The method in accordance with the direct embodiment can be practiced in particular where the second member is a relatively  
15 large molecule or a complex of molecules, the binding of which to the immobilized member causing a considerable mass change. Where the analyte is a small molecule, it is usually preferred to practice the invention by an indirect embodiment, since binding of such an analyte to the probe will bring about only a very small change of  
20 mass. The second member in such a case will typically be a large molecule, e.g. an antibody with a binding affinity to said analyte.

An example of the direct embodiment of the invention is the determination of an antibody in a biological sample in which case the electrode has immobilized thereon an antigen to which said  
25 antibody specifically binds; or the determination of a protein antigen by the use of an electrode having immobilized thereon an anti-antigen antibody.

In accordance with the indirect embodiment, the immobilized member may be an immobilized analyte molecule or a molecule

with a similar binding specificity to said second member as said analyte. Preferably, the immobilized analyte molecule has a lower binding affinity to said second member than the analyte, to allow effective depletion of said second member in the presence of the  
5 analyte.

An example of the indirect embodiment is the use of an immobilized antigen in order to determine an identical or related antigen in a biological sample to be tested. In accordance with this specific example, the biological sample, e.g. a plasma sample is first  
10 reacted with a reagent solution comprising an antibody which specifically binds to the antigen to be determined. After binding, the concentration of free (unbound) antibody becomes lower. Following an incubation period, a probe having antigen molecules immobilized thereon (the immobilized antigen, in this case being said immobilized  
15 member) is challenged with the reacted solution, and the determination of the free antibody then serves as an indication of said antigen in the tested biological sample. As will no doubt be appreciated by the artisan, the concentration of said free antibody will be in opposite correlation to the concentration of the antigen in the tested sample.

20 Furthermore, as will also be appreciated, an antibody in a tested biological sample rather than an antigen may be determined in an analogous manner, *mutatis mutandis*.

The analyte may at times also be a molecule suspended or dissolved in a gas, e.g. various airborne chemicals. In such a case,  
25 a gas suspected of containing an analyte is first passed (e.g. "bub-  
bled") through a suitable liquid which can dissolve the analyte, and this liquid is then tested for the presence of the analyte therein. Obviously, as gaseous chemicals are typically small molecules,

determining of such analyte is preferably carried out by the indirect embodiment.

At times, in order to increase sensitivity, rather than determining the  $\Delta f$  response within the liquid, the probe is first dried  
5 and then the measurement of  $\Delta f$  is performed with the probe embedded in a gas or in a vacuum.

The recognition pair, of which a first member is immobilized on the probe's metal plate, may, for example, be an antigen-antibody, sugar-lectin, ligand-receptor, biotin-avidin, enzyme-  
10 substrate, oligonucleotide-complementary oligonucleotide, oligonucleotide-protein, and oligonucleotide-cell, and generally any pair of molecules with specific binding affinity to one another.

As a result of binding of the second member to the immobilized first member or the dissociation of the two members and  
15 the release of the second member from the probe, there is a change in mass which in turn results in a change in the resonance frequency (i.e.  $\Delta f$  response). The degree of  $\Delta f$  response correlates with the extent of binding or release of said second member and depends on the concentration of said analyte in the tested liquid surrounding the  
20 electrode. Thus, the extent of change in the resonance frequencies may be used, in accordance with a preferred embodiment of the invention, as an indication of the concentration of said analyte in the medium.

The metal plates carrying said immobilized member may be  
25 selected from a variety of metals, particularly such having the capability to associate chemically with, attach or chemisorb a sulphur-containing moiety. The metal plates are preferably made of or coated by metals such as gold, platinum, silver or copper.

The immobilized member is preferably immobilized on the surface of the metal plate by means of a linking group, which typically may have the following general formula (I):





wherein:

- Z** represents a sulphur-containing moiety which is capable of chemical association with, attachment to or chemisorption onto said metal;
- 10 **R**<sup>1</sup> represents a connecting group;
- Q** is a functional group which is capable of forming a covalent bond with a moiety of said first member of the recognition pair.


**Z** may for example be a sulphur atom, obtained from a thiol group, a disulphide group, a sulphonate group or sulphate groups.

**R**<sup>1</sup> may be a covalent bond or may be a peptide or polypeptide or may be selected from a very wide variety of suitable groups such as alkylene, alkenylene, alkynylene phenyl containing chains, and many others.

Particular examples of **R**<sup>1</sup> are a chemical bond or a group having the following formulae (IIa), (IIb), (IIc) or (IId):

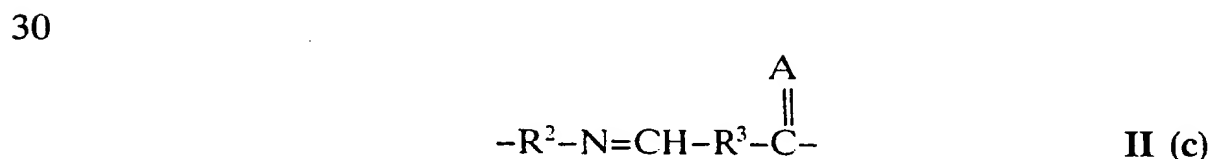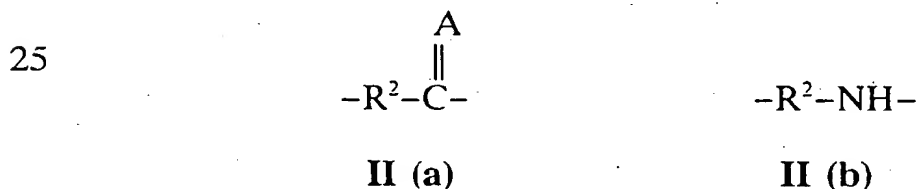





5

wherein

$R^2$  or  $R^3$  may be the same or different and represent straight or branch alkylene, alkenylene, alkynylene having 1-16 carbon atoms or represent a covalent bond,

10

**A** and **B** may be the same or different and represent O or S,


**Ph** is a phenyl group which is optionally substituted, e.g. by one or more members selected from the group consisting of  $\text{SO}_3^-$  or alkyl groups.

15

**Q** may for example be a functional group capable of binding to a carboxyl residue of a member of a recognition pair such as an amine group, a carboxyl group capable of binding to amine residues of the member of a recognition pair; an isocyanate or isothiocyanate group or an acyl group capable of binding to an amine residue of the member of a recognition pair; or a halide group capable of binding to hydroxy residues of the protein or a polypeptide. Particular examples are the groups  $-\text{NH}_2 - \text{COOH}$ ;  $-\text{N}=\text{C}=\text{S}$ ;  $\text{N}=\text{C}=\text{O}$ ; or an acyl group having the formula  $-\text{R}^a - \text{CO}-\text{G}$  wherein

**G** is a halogen such as Cl or OH,  $\text{OR}^b$ , a  $\begin{array}{c} \text{O} \\ \parallel \\ -\text{OC}-\text{R}^b \end{array}$  group or a


25

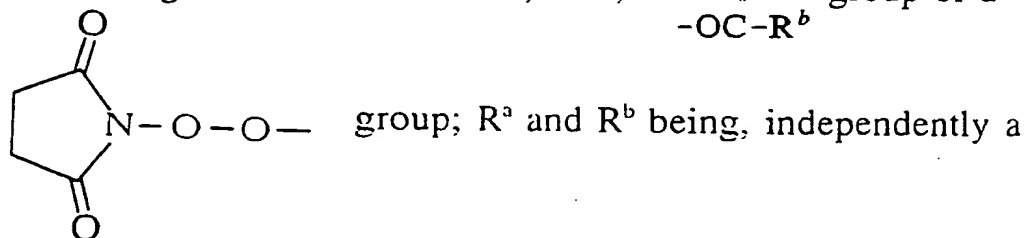


$\text{C}_1-\text{C}_{12}$  alkenyl, alkenyl or a phenyl containing chain which is optionally substituted, e.g. by halogen.

Particular examples of such a linking group are cysteamine (III), cystamine (IV) and cysteic acid N-hydroxysuccinimide ester (V) having the formulae:


5




10




15




20




25




30

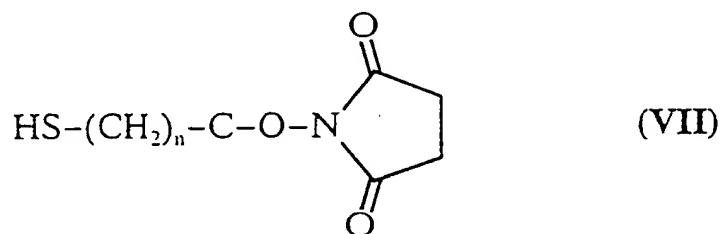

35

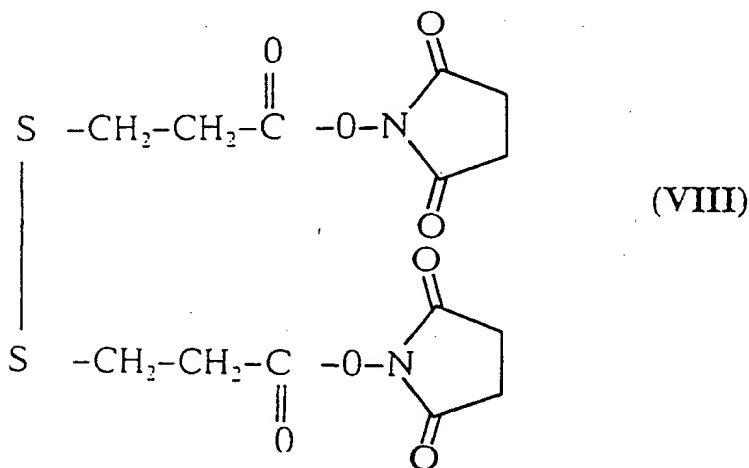

40

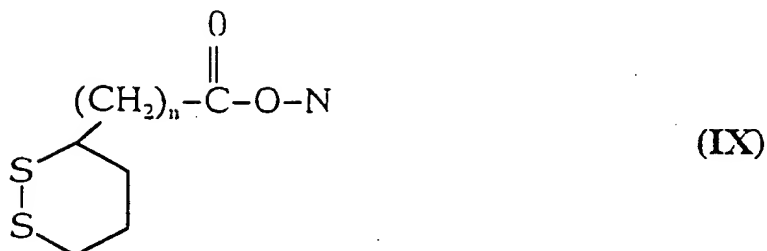

wherein  $n$  and  $m$  are integers between 1-24, preferably 1-12 and most preferably 1-6.

The sensitivity of the method of the invention may be increased by the use of a molecule, moiety or a complex, which is complexed or bound to said second member. Such a sensitivity increasing moiety, molecule or complex will be referred to herein as "*amplifier group*". The amplifier group may be a molecule or a complex having a binding affinity to said second member. Such an amplifier group may be made to bind to said second member after same has bound to the immobilized member or prior to such binding. The binding or complexing of the amplifier group to said second member will increase the mass change as a result of binding of said second member, or dissociation and release of said second member, as the case may be, and accordingly there will be a more noticeable  $\Delta f$  response, and hence an increase in sensitivity.

By increasing the sensitivity of the system in the manner described above, a  $\Delta f$  response can be measured even after binding or release of only a few second member molecules to the probe.

Binding of two members of a binding couple to one another is typically a high affinity binding, namely the two members do not dissociate easily from one another and even after proper rinsing, the second member may still remain substantially bound to the first immobilized member. In order to re-use the probe for a further measurement, there is a need to dissociate the second member from

the immobilized member and remove it from the system. In accordance with an embodiment of the invention, the dissociation is achieved by means of a group, attached to the immobilized member which has two isomerization states and is capable of switching

5 reversibly between its two states by exposure to two different types of energy ("*isomerizable group*"). Such an isomerizable group will typically have a first and second isomerization state and by reversibly switching from one state to the other, each such switching achieved with a different energy type, will cause a conformational change in

10 the immobilized member which will bring about a change in the binding of affinity of the immobilized member to said analyte. Such a conformational change may, for example, be the occlusion of the binding site or a conformational change within the binding site which will cause a reduction in the binding affinity of the immobilized

15 member to the second member. Such a reduction in affinity or *vice versa* may be defined as change or switch from a state of high affinity to a state of low affinity or *vice versa*. In the first state, the immobilized member will have a high affinity to binding to the second member and after performing a measurement, the probe will

20 be treated so that said isomerizable group will switch to the second state and consequently said second member will dissociate from the immobilized member. After removal of said analyte from the system, typically by rinsing and washing away of the rinsing solution, the probe will be further treated so that said isomerizable group

25 switches back to said first state, whereby the probe will be ready for re-use.

The switching between the two states may be achieved by exposure to light of an appropriate wavelength within the infra red, visible or ultra violet range. The reactive isomerizable group will

switch from said first state to said second state by exposure to light energy at a first wavelength and from a second state to said first state by exposure to a second, different than the first, wavelength. It is also possible that one of the switches will be achieved by mild thermal treatment.

Thus, in accordance with an embodiment of the invention the immobilized member of the recognition pair has or is linked to an isomerizable group reactive to exposure to light energy; said group having a first and a second state and is capable of being converted from the first state to the second state by exposure to irradiation of light of a first wavelength and from the second to the first state by exposure to irradiation of light of a second wavelength; the exposure inducing a change in affinity of the immobilized member for binding to said second member, whereby in the first state said immobilized member has a high affinity of binding to said second member such that said second member remains essentially bound to the immobilized member and in said second state said immobilized member has a low affinity of binding to said second member, such that the bound said second member is readily dissociated.

According to another embodiment of the invention, said switching from the first state to the second state is by exposure to light energy but the switching from said second state to said first state is by mild thermal treatment.

In accordance with the process aspect of the invention, there is provided a process for preparing a probe for use in the above method and system, comprising:

(a) immobilizing said linking group onto the plate by chemical association attachment or chemisorption of the sulphur-containing moiety (Z); and

5 (b) binding the member of the recognition pair to be immobilized to said functional group (Q).

Steps (a) and (b) may also be reversed so that immobilization takes place before binding.

The process aspect of the invention further provides a process for preparing a probe carrying immobilized members which  
10 are attached to an isomerizable group, the process comprising:

(a) immobilizing said linking group onto the said plate by chemical association attachment or chemisorption of the sulphur-containing moiety;

15 (b) chemically modifying a member of said recognition pair with a photoisomerizable group whereby the modified member changes its binding affinity to the other member of the recognition pair by exposure to energy; and

(c) binding the modified member of the recognition pair to said functional group of the linking group immobilized on the electrode.

20 Steps (b) and (c) can be reversed such that the isomerizable group is bound to the member of the recognition pair after it has been immobilized in the electrode and so can steps (a) and (b).

The invention will now be illustrated in the following description of some specific embodiments, with occasional reference  
25 to the annexed drawings, without prejudice to the generality of the foregoing.

## DESCRIPTION OF THE DRAWINGS

In the drawings:

**Fig. 1** shows a scheme of QCM for antibody analysis;

**Fig. 2** shows a scheme for QCM analysis of an antigen by a  
5 QCM probe modified with an antigen monolayer and saturated with the Ab;

**Fig. 3** shows a scheme for QCM analysis of an antigen by treatment of an antigen monolayer QCM probe with a mixture consisting of the analyte antigen and a constant, predetermined Ab  
10 concentration;

**Fig. 4** shows a scheme for amplified QCM analysis of an Ab by the application of an anti-Ab or anti-Ab conjugate;

**Fig. 5** shows an amplification of an antigen QCM analysis by the detachment of an Ab-conjugate complex from the QCM  
15 monolayer electrode;

**Fig. 6** shows a possible configuration of Ab-conjugate complexes;

**Fig. 7** shows an amplification of antigen QCM-analysis by treatment of an antigen monolayer QCM-probe with a mixture  
20 consisting of the antigen analyte and a fixed, predetermined, concentration of the Ab-conjugate complex;

**Fig. 8** shows the regeneration of the sensing member by light isomerization;

**Fig. 9** shows formulae of photoisomerizable groups and some  
25 examples of photo-induced and heat treatment-induced conformational changes;

**Fig. 10** shows the organization of cystamine monolayer on a QCM gold (Au) electrode;

**Fig. 11** shows a QCM-analysis of cystamine monolayer formation;

**Fig. 12** shows the activation of the QCM -monolayer electrode by glutardialdehyde;

5 **Fig. 13** shows QCM-analysis of the glutardialdehyde monolayer formation;

**Fig. 14** shows the organization of HIV-1 antigen peptide on QCM Au-electrode;

**Fig. 15** shows QCM-analysis of a 3000-titer serum of HIV-1  
10 Ab;

**Fig. 16** shows QCM-analysis of goat serum (titer 80) by the HIV-1 antigen electrode;

**Fig. 17** shows the organization of a dinitrophenyl monolayer QCM electrode;

15 **Fig. 18** shows a QCM-analysis of anti-DNP-Ab by dinitrophenyl antigen monolayer QCM electrode;

**Fig. 19** shows organization of a fluorescein antigen monolayer QCM-electrode;

**Fig. 20** shows QCM-analysis of 2,4-dinitrophenol,  $1.4 \times 10^{-7}$   
20  $\text{g} \cdot \text{ml}^{-1}$ , by detachment of DNP-Ab from the antigen-DNP-Ab monolayer electrode;

**Fig. 21** shows the assembly of the dinitrophenyl antigen-DNP-biotin-avidin conjugate complex on a QCM-electrode;

**Fig. 22** shows a scheme of QCM analysis of a sample solution  
25 that contains 2,4-dinitrophenol (DNP) by displacement of the dinitrophenyl antigen-DNP-biotin-avidin conjugate complex associated with a QCM electrode; and

**Fig. 23** shows the  $\Delta f$  response in the system of Fig. 22 following exposure to  $2.7 \times 10^{-8} \text{ g} \cdot \text{ml}^{-1}$  of DNP.



## DETAILED DESCRIPTION OF THE INVENTION

The invention will now be illustrated by several specific embodiments, it being understood that these are given as examples only and that the invention is not limited thereto.

5           Reference is first being made to Fig. 1 showing a schematic representation of a manner of carrying out the invention according to the direct embodiment. A probe, generally designated 2, comprises a piezoelectric crystal 4 and two gold electrodes 6 (for simplicity, only one electrode is schematically shown while another electrode is  
10           positioned on the opposite face of the crystal). Immobilized on the electrode are a plurality of antigens 8 which are members of a recognition pair, the pair consisting of these antigens and antibodies 10 which latter is the analyte to be determined. Electrodes 6, as well as the corresponding electrodes in the other  
15           embodiments shown and described below, are connected to an electric or electronic circuitry (not shown) for generating alternating current between the pair of electrodes 6 and for measuring the resonance frequency of the electrodes.

          Prior to determination of the analyte, an initial resonance  
20           frequency of the sensing member, is determined ( $f_0$ ). Then, the probe 2 is challenged with a liquid containing the antibodies 10 which, if present in the liquid, bind to the immobilized antigen 8.

          Consequently, there is a change in mass and an accompanying change,  $\Delta f$ , in resonance frequency.  $\Delta f$  is proportional to the  
25           mass of the bound antibodies, which in turn is proportional to the initial concentration of the antibodies in the tested liquid medium.

          In a similar manner, *mutatis mutandis*, it is possible also to determine the concentration of an antigen in a liquid medium, by having the antibodies immobilized on the surface of the electrodes,

particularly where the antigens are relatively large molecules, e.g. proteins.

Reference is now being made to Fig. 2, showing a manner of carrying out the invention in accordance with the indirect embodiment. A probe 12 of this embodiment comprises a piezoelectric crystal 14 carrying gold electrodes 16, having immobilized thereon antigens 18 (similarly as above the electrodes are connected to an electric or electronic circuitry for passing current and measurement of resonance frequency). In a first step (A), the sensing member is contacted with a medium comprising a large amount of antibodies 20, which bind to the immobilized antigens, the amount of antibodies being sufficient to permit binding to saturation. At this stage, resonance frequency,  $f_0$ , of the sensing member is determined (B). The sensing member is then challenged (C) with a liquid medium containing analyte 22 to be determined, which is capable of specific binding to antibody 20, with a similar or at times larger binding affinity than that of the antibody 20 to immobilized member 18. As a result of binding competition with the immobilized member, some of the bound antibodies 20 are released, and consequently there is a reduction in the immobilized mass and a resulting increase in the resonance frequency (D). This increase will be proportional to the amount of released mass, which is in turn proportional to the amount of agent in the tested liquid medium.

Reference is now being made to Fig. 3, showing an alternative embodiment of carrying out the invention according to the indirect embodiment. The probe 30 according to this embodiment comprises, similarly as before, piezoelectric crystal 32 carrying gold electrode 34 with immobilized antigens 36. Antigen 36 is a member of a recognition pair, the other member being antibody 38.

The system shown in Fig. 3 serves for the determination of analyte 40. A tested liquid sample is first mixed (A) with antibody 38. If the analyte 40 is present in the tested sample, antibody 38 will bind to analyte 40 and will consequently be eliminated from the system. The mixture is then reacted with the probe. If no antigen 40 is present in the tested medium (B), there will be a maximum binding of antibodies 40 to members 38, and consequently a big increase in mass and a corresponding relatively big reduction in resonance frequency  $f'$ . Against this, where the liquid medium contains a large amount of analyte 40, all the antibodies 38 will be eliminated from the system, and there will be practically no change in the resonance frequency, which will remain essentially equal to  $f_0$  (C).

Reference is now made to Fig. 4, showing a scheme for an amplified QCM analysis of an analyte of a recognition pair. The scheme in this figure is essentially the same as in Fig. 1, the difference being the addition of amplifier group 40, which can bind to or complex with antibody 42. Amplifier group 40 functions to increase sensitivity of the system. After the antibody is allowed to bind to the immobilized antigens 44, or simultaneously therewith, group 40 is brought into contact with the sensing member, whereby it binds to the antibodies 42 bound to the immobilized members 44. Consequently, rather than a small  $\Delta f$  response, in this case there will be a much larger  $\Delta f$  response arising from the considerable increase of mass caused by group 40.

Fig. 5 is an amplification version of the scheme shown in Fig. 2, making use of an amplifier group 46. The probe 48 comprises a piezoelectric crystal 50 with gold electrodes 52 having immobilized thereon antigens 54, which are one member of a recognition

pair consisting also of antibodies 56. Probe 48 is challenged (A) with a solution comprising antibodies 56 in an amount to ensure that antibodies 56 will bind to immobilized antigens 54 saturating all possible binding sites. Group 46 is then added (B), which then binds to antibodies 56. Group 46 may, for example, be an antibody directed against antibodies 56. At this stage a first reading,  $f_0$ , is obtained (C) and then probe 48 is challenged with analyte 58 (D) which by a binding competition with immobilized antigen 54 with antigen 48, brings to some release of complexes, consisting of antibodies 56 and group 46 from the probe. This will result in a relatively big mass reduction which will in turn result in a relatively big increase in resonance frequency (E).

The sensitivity of the system can be increased by creating large molecular complexes by means of complexation or conjugation. Examples are shown in Fig. 6. The basic configuration is a complex formed between an antibody 60 and an anti-antibody 61 shown in Fig. 6A. The sensitivity can be increased further by increasing the molecular complex mass, for example by binding or complexing to colloid particle 62 (Fig. 6B).

Another way to increase the molecular complex mass, shown in Fig. 6C, is to conjugate biotin molecules 63 to antibody 60, and then by reacting the conjugated antibody 64 with avidin molecule 65, a large complex 66 comprising mainly avidin molecule 65 and antibody 60 is formed. A further scheme, shown in Fig. 6D, is the complexation of avidin molecules in a similar fashion to the anti-antibody 61.

Fig. 7 shows a system which is essentially similar to Fig. 3, with the addition of an amplifier group 71 bound to antibody 70. The manner of performing of the method is essentially the same as

that of Fig. 3, and the reader is referred to the description relating to Fig. 3 for explanations.

Reference is now being made to Fig. 8, which is a representation of another embodiment in accordance with the direct  
5 embodiment of the invention. This embodiment allows the regeneration of the probe after performance of the measurement for re-use in subsequent measurement. This feat is achieved, in accordance with this embodiment, by modifying the immobilized member **81** by isomerizable group **82** which has two states, **A** and **B**, and is capable  
10 of switching reversibly between the two states by exposure to light of an energy  $h\nu_1$  (having a wavelength  $\lambda_1$ ) and energy  $h\nu_2$  (having a wavelength  $\lambda_2$ ). (This switching of the two states is shown schematically at the bottom of the figure.) The switching between the two isomerization states **A** and **B** causes a conformational change of the  
15 modified immobilized member, which brings to a change in its affinity to binding to member **83** (in this case an antibody): in state **A**, the modified immobilized member is capable of binding member **83** with a high affinity; in state **B**, the affinity of binding to member **83** becomes very low.

20 The method of performance of the analyte determination (A) is essentially similar to Fig. 1 and the reader is referred to the description relating to this figure, the difference being that after finalizing the determination, the sensing member is illuminated by a light having a wavelength  $\lambda_1$  (B), and consequently group **82** changes  
25 from state **A** to state **B**, which brings to a change in confirmation of immobilized member **82**, which causes release of member **83**. After rinsing (C), the electrode can be regenerated (D) by illumination with a light having a wavelength  $\lambda_2$ .

Examples of five families of compounds which could be used as said group can be seen in Fig. 9 - structures (1) to (5) namely: azobenzenes (1), spiropyranes (2), fulgides (3), thiophenefulgides (4) or malachite green (5). Examples of the structural change in three of these five families of compounds which occurs upon their exposure to irradiation of light energy of an appropriate wavelength is illustrated by schemes (6) to (8) of Fig. 9. Specifically scheme (6) exemplifies azobenzenes, scheme (7) spiropyranes and scheme (8) malachite green. These compounds all require structural modification to prepare a group which can be linked to the member of a recognition pair to be immobilized on the surface of the electrode. Accordingly, in the preferred embodiment these compounds are modified chemically to form active esters, amine, carboxylic acid, or halide derivatives. The presence of such moieties facilitates linkage of the group to the immobilized member of the recognition pair. Scheme (9) illustrates both the appropriate wavelengths of light energy required to change spiropyran from a first state (A) to a second state (B) in which it is in its merocyanine form and also the structures of the first and second isomer states with (9B) and without (9A) the N-hydroxysuccinimide ester moiety.

Examples of photoisomerizable active esters which can be seen in Fig. 9 are N-hydroxyoxsuccinimide ester of N-propionic acid spiropyran (10), N-hydroxyoxsuccinimide ester of 4-carboxy azobenzene (11) and N-hydroxyoxsuccinimide, ester of thiophenefulgide (12).

The invention will now be illustrated further by a description of experiments conducted in accordance with the invention.

## 1. General

### 1.1 Piezocrystals and experimental set-up

All measurements were performed using 9 MHz quartz piezocrystals (QPC) (AT cut type) covered with a layer (ca. 0.2 cm<sup>2</sup>) consisting of sputtered gold (ca. 3000Å) on a titanium (Ti) substrate (ca. 500 Å) (Seiko EG&G). The frequency measurements were performed using a Quartz Crystal Analyzer (model QCA917, Seiko EG&G) linked to a personal computer.

### 1.2 Primary electrode modification by a functionalized monolayer for antigen or antibody attachment. Specific example - modification of Au-quartz crystal by a cystamine monolayer

The primary step for the organization of the sensing piezoelectric crystal involves the modification of the Au-electrode crystal by a functionalized thiolate monolayer that enables subsequent linkage of an antigen-Ab complex to the monolayer. Among the various possible functionalized monolayers (amine, carboxyl, hydroxy, diazonium) the organization of a cystamine monolayer is exemplified in Fig. 9. Quartz piezocrystal (QPC) was soaked in a solution of 0.2 M cystamine in water for 2 h. The frequency change during the cystamine adsorption on the electrode was a tool to detect the cystamine deposition, Fig. 10. The electrode was then rinsed thoroughly with water to remove the physically adsorbed cystamine. The frequency after the electrode rinsing was not altered as compared to the final value obtained during the adsorption process. That is, the cystamine molecules are strongly linked to the electrode surface. The observed frequency change  $\Delta f = -200$  Hz (minus reflects frequency decrease) corresponds to the mass density of cystamine on the electrode corresponding to  $1.16 \times 10^{-6}$  g·cm<sup>-2</sup> or ca.  $5.2 \times 10^{-9}$  mol·cm<sup>-2</sup>

(the densities are calculated using a geometrical area of the electrode).

## 2. Experimental Results

### 5        2.1 QCM detection of HIV-1 antibody using an electrode modified with HIV-peptide antigen

An Au electrode modified with a primary cystamine monolayer was activated with glutaric dialdehyde (Fig. 12). The  
10 reaction was performed by treatment of the crystal in the QCM-cell with a 5% (v/v) glutaric dialdehyde solution in water for 20 min. at room temperature and following the frequency changes of the crystal during the reaction, (Fig. 13). The value  $\Delta f = -300$  Hz corresponds to an electrode coverage of the electrode with glutaric dialdehyde of  
15 ca.  $1.5 \times 10^{-8}$  mol·cm<sup>-2</sup>. The resulting modified electrode was used for covalent immobilization of the HIV antigen (Fig. 14). The reaction was carried out by treatment of the crystal at room temperature in 0.01 M phosphate buffer, pH 7.4, containing 0.1 M NaCl and 0.4 mg·ml<sup>-1</sup> HIV-antigen for 12 hours. The immobilization was  
20 monitored by measuring the frequency of the modified crystal. The final frequency change was  $\Delta f = -140$  Hz that yields a density of the immobilized HIV-antigen that corresponds to  $6.4 \times 10^{-11}$  mol·cm<sup>-2</sup>. The electrode modified with the antigen was used for detection of HIV-1 antibody (Fig. 15). A frequency change of  $\Delta f = 18$  Hz after  
25 10 minutes is observed for an HIV-1 sample with a titer corresponding to 3000.

The specificity of HIV-Ab detection was examined by treatment of the antigen electrode with goat serum (titer 80). A frequency decrease of only 2 Hz was observed after 10 minutes as a  
30 result of non-specific adsorption (Fig. 16). At lower measurement



time intervals (4 minutes) the HIV-Ab causes a frequency change of  $\Delta f = 15$  Hz where the BSA control sample does not stimulate any detectable frequency change in the crystal frequency.

## 5            2.2 A dinitrophenol antigen monolayer QCM-electrode for analysis of DNP-Ab

10            A cystamine Au-modified electrode was obtained as described under 2.1. The modified QCM-electrode was treated with a solution of 0.2 M 3,5-dinitrosalicylic acid, N-hydroxy-sulfosuccinimide sodium salt (as a promoter) and 1-ethyl-3-(3-dinitromethylaminopropyl)carbodiimide (EDC) as a coupling reagent in 0.05 M HEPES buffer, pH=7.3, to generate the dinitrophenol antigen monolayer on the surface (Fig. 17). The reaction was carried out for 2 h at room temperature. The frequency change of the crystal as a result of coupling of 3,5-dinitrosalicylic acid was -90 Hz, corresponding to an antigen coverage of  $1.3 \times 10^{-12}$  mol·cm<sup>-2</sup>.

15            The antigen QCM electrode was challenged with a DNP-Ab solution  $1.4 \times 10^{-11}$  M. A frequency change of  $\Delta f = -30$  Hz was observed after 800 seconds, indicating the adsorption of DNP-Ab to the crystal (Fig. 18).

## 25            2.3 A fluorescein antigen monolayer QCM-electrode for analysis of anti-fluorescein

30            A cystamine Au-modified electrode was obtained as described under 2.1. The modified electrode was reacted with fluorescein isothiocyanate to generate the antigen monolayer electrode (Fig. 19). Upon treatment of the electrode with anti-fluorescein Ab,  $1 \times 10^{-6}$  mg·ml<sup>-1</sup>, a frequency change of  $\Delta f = -60$  Hz was observed.

**2.4 Dinitrophenol antigen monolayer electrode with bound DNP-Ab for 2,4 dinitrophenol analysis in a sample according to the configuration shown in Fig. 2, where displacement of the antibody pre-immobilized on the antigen monolayer electrode surface is used for detection of an antigen in a sample**

A cystamine Au-modified electrode was obtained as described under 2.1. A solution of 0.2 M 3,5-dinitrosalicylic acid, N-hydroxysulfosuccinimide sodium salt (as a promoter) and 1-ethyl-3-(3-dinitromethylaminopropyl)carbodiimide (EDC) (as a coupling reagent) in 0.05 M HEPES buffer, pH 7.3, was used for further modification of the electrode surface with dinitrophenol units (Fig. 17). The reaction was performed for 2 h at room temperature and the final frequency change due to immobilization of 3,5-dinitrosalicylic acid was ca. -90 Hz, corresponding to an antigen coverage of  $2.5 \times 10^{-9}$  mol·cm<sup>-2</sup>. This antigen monolayer-modified electrode was used for specific adsorption of dinitrophenol antibody (monoclonal mouse IgE anti-DNP). The frequency change of the crystal as a result of Ab-binding was monitored again (similarly to Fig. 18). The final frequency change of  $\Delta f = -50$  Hz resulted from the antibody deposition and gives the surface density of the antibody as ca.  $1.93 \times 10^{-7}$  g·cm<sup>-2</sup>. The antigen/antibody modified electrode was treated with an analyte sample aqueous solution containing  $1.4 \times 10^{-7}$  g·ml<sup>-1</sup> 2,4-dinitrophenol (DNP) and the frequency change, resulting from the antibody desorption was recorded (Fig. 20). The displacement of the antibody was induced by its reaction with a new available antigen (DNP) being in the solution.

**2.5 Determination of 2,4-dinitrophenol by interaction with a predetermined concentration of DNP-Ab and analysis of the mixture with the antigen monolayer crystal according to the configuration of Fig. 3**

The electrode was modified with 3,5-dinitrosalicylic acid as described under 2.2. This electrode was treated with an aqueous mixture that contains the sample analyte, 2,4-dinitrophenol,  $1.4 \times 10^{-11}$  M and a predetermined DNP-Ab concentration of  $1.4 \times 10^{-1}$  M. The final frequency change of the crystal was  $\Delta f = 7$  Hz after 800 seconds of interaction. For comparison, treatment of the electrode with a sample that lacks 2,4-dinitrophenol but includes the predetermined DNP-Ab concentration,  $1.85 \times 10^{-11}$  M, results in a frequency change of  $\Delta f = 30$  Hz after 800 seconds of interaction.

**2.6 Amplification of 2,4-dinitrophenol analysis by an antigen-DNP-Ab-biotinavidin complex associated with the quartz electrode according to the configuration shown in Fig. 5**

**2.6.1. Preparation of biotin modified DNP-Ab**

The 0.02 M DNP-antibody solution in 0.1 M phosphate buffer, pH 7.2, was reacted with 0.02 M biotin amidocaproate N-hydroxysuccinimide ester for 3 h at 25°C. The reaction mixture was dialyzed overnight at 4°C against a 0.01 M phosphate buffer, pH 7.4, and the purified DNP-antibody-biotin was used to assemble the antigen-Ab-conjugate complex on the crystal electrode.

**2.6.2 Construction of an antigen-DNP-Ab-biotin-avidin complex on the QCM electrode**

The antigen-Ab-conjugate complex was assembled onto the crystal electrode as outlined in Fig. 21. An electrode that included a dinitrosalicylic acid monolayer was prepared as described under

2.2. The monolayer-modified crystal was treated with a solution of biotin-modified DNP-Ab,  $1.25 \text{ mg} \cdot \text{ml}^{-1}$ . Adsorption of the modified Ab to the monolayer antigen induces frequency change of  $\Delta f = -50 \text{ Hz}$  indicating a surface coverage by the Ab corresponding to  $1.8 \times 10^{-12} \text{ mol} \cdot \text{cm}^{-2}$ . The resulting antigen-DNP-Ab-biotin monolayer electrode was treated with avidin solution,  $1.0 \text{ mg} \cdot \text{ml}^{-1}$ . The resulting frequency change after 5 minutes as a result of formation of the biotin-avidin complex is  $\Delta f = -120 \text{ Hz}$  which corresponds to a surface coverage of  $5.5 \times 10^{-12} \text{ mol} \cdot \text{cm}^{-2}$  with the avidin complex.

10

3. Analysis of 2,4-dinitrophenol by the antigen-DNP-Ab-conjugate complex QCM electrode, according to the configuration shown in Fig. 5

15

The antigen-DNP-Ab-biotin-avidin complex QCM electrode was treated with a 2,4-dinitrophenol solution,  $2.7 \times 10^{-8} \text{ g} \cdot \text{ml}^{-1}$ . The caused dissociation of the DNP-Ab complex conjugate from the electrode by the analyte antigen, as illustrated in Fig. 22, which was followed by the frequency changes of the crystal. A frequency change of  $\Delta f = 30 \text{ Hz}$  is observed after 400 seconds of interaction (Fig. 23).

20

**CLAIMS:**

1. A system for determining binding between two members of a recognition pair, comprising:
- 5 (a) a probe comprising a piezoelectric crystal, electrodes on two opposite faces of the crystal, and one or more metal plates carried on the surface of said crystal, said metal plates being the same or different than said electrodes, the metal plates having immobilized thereon a first member of a recognition pair,
- 10 binding of a second member of the recognition pair to the first member, or dissociation between the two members and release of the second member from the probe, causing a change of mass resulting in a change to the probe's resonance frequency;
- (b) a vessel for holding a liquid, the probe being immersed in the
- 15 liquid to allow either
- binding between the first, immobilized member and the second member dissolved in the liquid, or
  - release of the second member, *a priori* bound to said first member, into said liquid; and
- 20 (c) electric or electronic circuitry for generating an alternating electric field between said electrodes, and measuring of the resonance frequency of said crystal.
2. A system according to Claim 1, wherein said immobilized members are immobilized on the surface of said metal plates by
- 25 means of a linking group, having the following general formula (I):



wherein:

**Z** represents a sulphur-containing moiety which is capable of chemical association with, attachment to or chemisorption onto said metal;

**R<sup>1</sup>** represents a connecting group;

5     **Q** is a functional group which is capable of forming a covalent bond with a moiety of said first member of the recognition pair.

3.     A system according to Claim 1, wherein the immobilized member has or is linked to an isomerizable group which changes its  
10    isomerization state as a result of exposure to energy, said group having a first and a second isomerization state and is capable of being converted from the first state to the second state by exposure to a first energy type and from the second to the first state by exposure to a second energy type; in the first state said immobilized  
15    member has a high affinity of binding to said second member, and in said second state, said immobilized member has a low affinity of binding to said second member.

4.     A system according to Claim 3, wherein the first energy type is light irradiation of a first wavelength and the second energy  
20    type is light irradiation of a second wavelength, the light being in the infrared, visible light or ultraviolet range.

5.     A system according to Claim 3, wherein one of the energy types is light irradiation in the infrared, visible light or ultraviolet range, and the other of said energy types is a mild thermal treatment.

25    6.     A method for determining binding between a first member of a recognition pair and a second member of a recognition pair, the second member being *a priori* contained in a liquid medium, comprising:  
(a) providing a probe comprising a piezoelectric crystal, electrodes on two opposite faces of the crystal, and comprising one or

more metal plates carried on the surface of said crystal, said plates being the same or different than said electrodes, the first member of the recognition pair being immobilized on the said plates;

- 5 (b) measuring an initial resonance frequency of the probe;
  - (c) contacting said probe with a liquid medium containing said second member for a time sufficient to allow binding between the two members; and
  - (d) measuring a second resonance frequency, a lower second  
10 resonance frequency as compared to the initial resonance frequency indicating the presence of said second member in the liquid medium.
7. A method for determining an analyte in a liquid medium, comprising:
- 15 (a) providing a probe comprising a piezoelectric crystal, electrodes on two opposite faces of the probe, and comprising one or more metal plates carried on the surface of said crystal, said metal plates being the same or different than said electrodes, the metal plates having immobilized thereon a first member of a recognition pair, the second member of said pair being non-covalently  
20 bound to said first member; said second member being capable of binding to said analyte, the binding between said second member and said analyte being competitive to the binding of said second member to said immobilized member;
  - 25 (b) measuring an initial resonance frequency of the probe;
  - (c) contacting said probe with said liquid medium under conditions and for a time such that in the presence of said analyte, at least some of said second member will be released from the electrode and bind to said analyte; and

(d) measuring a second resonance frequency, a higher second resonance frequency as compared to the initial resonance frequency indicating the presence of said analyte in said medium.

5     8.         A method for determining an analyte in a liquid medium, comprising:

- 10     (a) providing a probe comprising a piezoelectric crystal, electrodes on two opposite faces of the crystal, and comprising one or more metal plates carried on the surface of said crystal, said metal plates being the same or different than said electrodes, said metal plates having immobilized thereon a first member of a recognition pair; the pair comprising a second member being capable of binding to said analyte, the binding between said second member and said analyte being competitive to the binding of said second member to said immobilized member;
- 15     (b) measuring an initial resonance frequency of the probe;
- (c) mixing said liquid medium with a solution containing said second member, the presence of said analyte in the medium causing binding thereto of said second member;
- 20     (d) contacting the mixture obtained in step (c) with said probe for a time sufficient to allow binding of said second member to the immobilized first member; and
- (e) measuring a second resonance frequency of the probe, a second resonance frequency lower than the initial frequency indicating presence of said analyte in the liquid medium.
- 25

9.         A method according to any one of Claims 6 to 8, wherein said analyte is a molecule *a priori* suspended or dissolved in a gas, the method comprising passing the gas through a liquid and then determining the analyte in the liquid.



10. A method according to any one of Claims 6 to 8, wherein the immobilized member is immobilized on the surface of the metal plate by a linking group, having the following general formula (I):



5 wherein:

**Z** represents a sulphur-containing moiety which is capable of chemical association with, attachment to or chemisorption onto said metal;

**R<sup>1</sup>** represents a connecting group;

10 **Q** is a functional group which is capable of forming a covalent bond with a moiety of said first member of the recognition pair.

11. A method according to any one of Claims 6 to 8, wherein the immobilized member has or is linked to a group which changes  
15 its isomerization state as a result of exposure to energy, said group having a first and a second isomerization state and is capable of being converted from the first state to the second state by exposure to a first energy type and from the second to the first state by exposure to a second energy type; in the first state said immobilized  
20 member has a high affinity of binding to said second member, and in said second state, said immobilized member has a low affinity of binding to said second member.

12. A probe comprising piezoelectric crystal having electrodes on two opposite faces of the crystal, and one or more metal plates  
25 carried on the surface of said crystal, said metal plates being the same or different than said electrodes, the metal plates having immobilized thereon a first member of a recognition pair.

13. A probe according to Claim 12, wherein said immobilized members are immobilized on the surface of said metal plates by means of a linking group, having the following general formula (I):



5 wherein:

**Z** represents a sulphur-containing moiety which is capable of chemical association with, attachment to or chemisorption onto said metal;

**R<sup>1</sup>** represents a connecting group;

10 **Q** is a functional group which is capable of forming a covalent bond with a moiety of said first member of the recognition pair.

14. A probe according to Claims 12 or 13, wherein the immobilized member has or is linked to a group which changes its isomerization state as a result of exposure to energy, said group having a first and a second isomerization state and is capable of being converted from the first state to the second state by exposure to a first energy type and from the second to the first state by exposure to a second energy type; in the first state said immobilized member has a high affinity of binding to said second member, and in said second state, said immobilized member has a low affinity of binding to said second member.

15. A probe according to Claim 14, wherein the first energy type is light irradiation of a first wavelength and the second energy type is light irradiation of a second wavelength, the light being in the infrared, visible light or ultraviolet range.

16. A probe according to Claim 14, wherein one of the energy types is light irradiation in the infrared, visible light or ultraviolet range, and the other of said energy types is a mild thermal treatment.

17. A process for preparing a probe according to Claim 13, comprising:

(a) immobilizing said linking group onto the plates by chemical association attachment or chemisorption of the sulphur-containing moiety; and

(b) binding the member of the recognition pair to be immobilized to said functional group of the connecting group.

18. A process for preparing a probe according to Claim 14, comprising:

10 (a) immobilizing said linking group onto the said plate by chemical association attachment or chemisorption of the sulphur-containing moiety;

(b) chemically modifying a member of said recognition pair with a group which changes its isomerization state as a result of exposure to specific energy types, whereby the modified member changes its binding affinity to the other member of the recognition pair by exposure to said energy type; and

15 (c) binding the modified member of the recognition pair to said functional group of the linking group immobilized on the electrode.

1/22

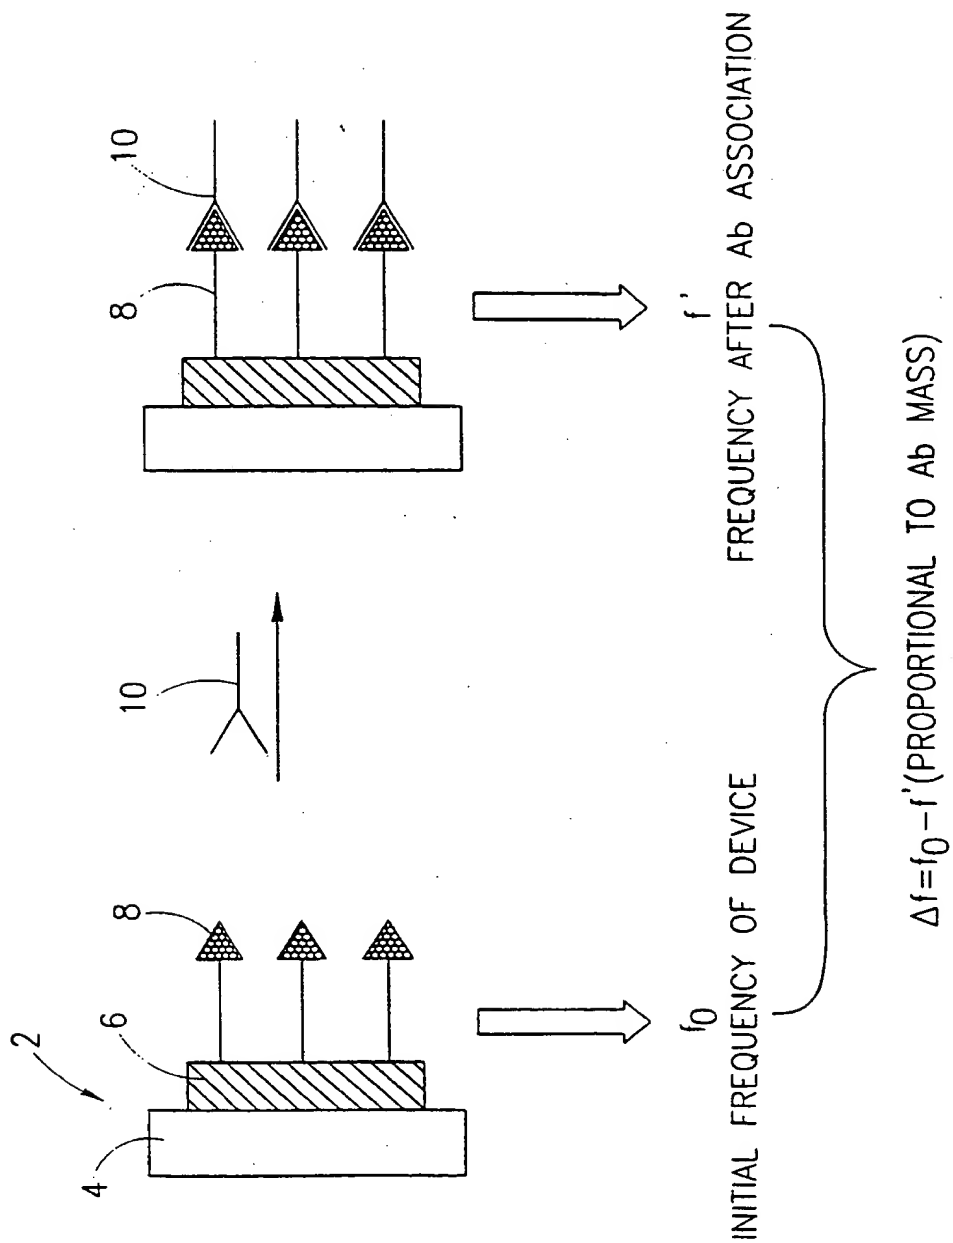


FIG. 1

2/22

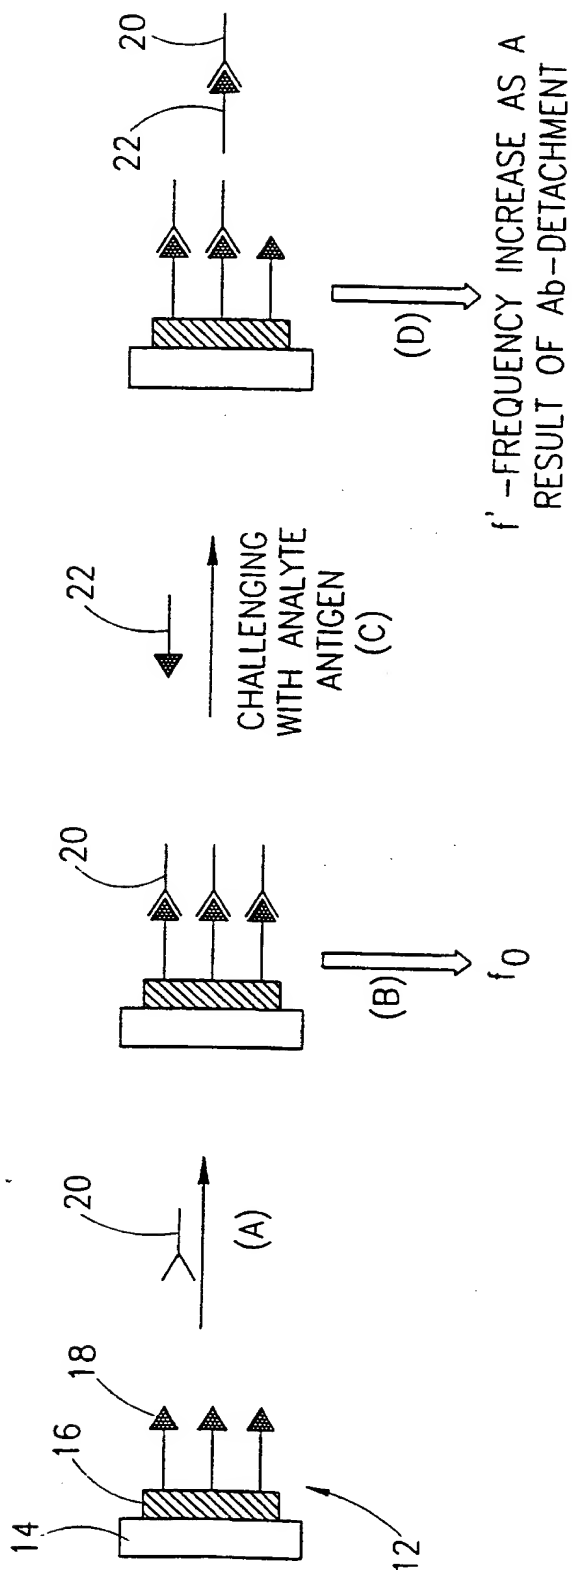


FIG.2

3/22

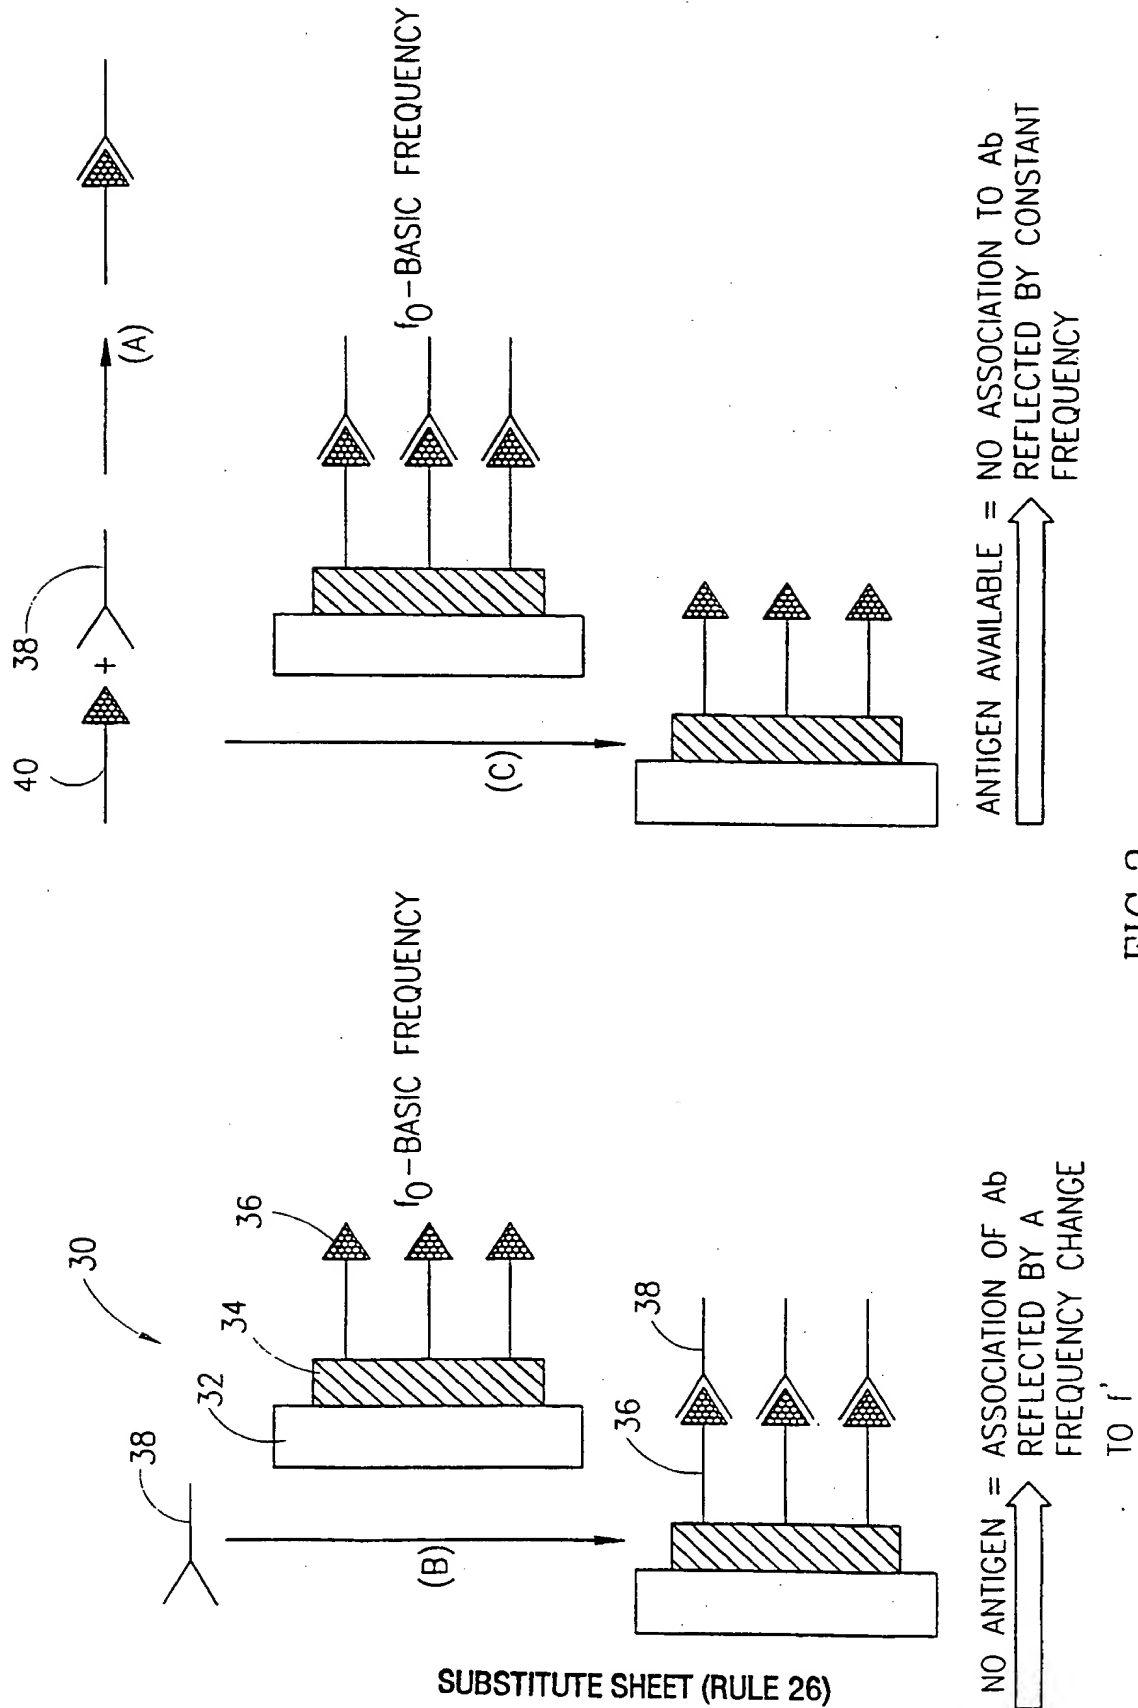


FIG.3

SUBSTITUTE SHEET (RULE 26)

4/22

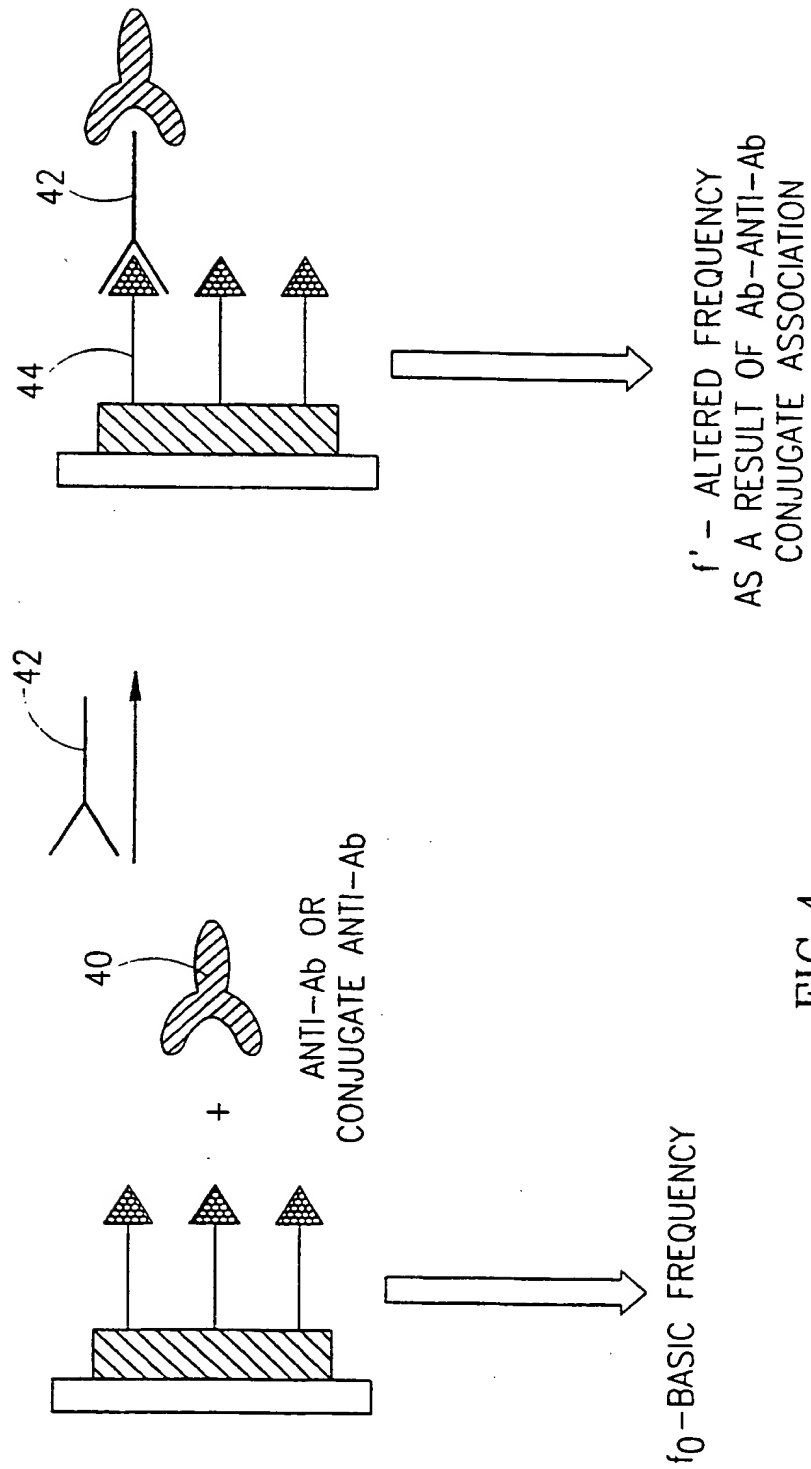


FIG.4

SUBSTITUTE SHEET (RULE 26)

5/22

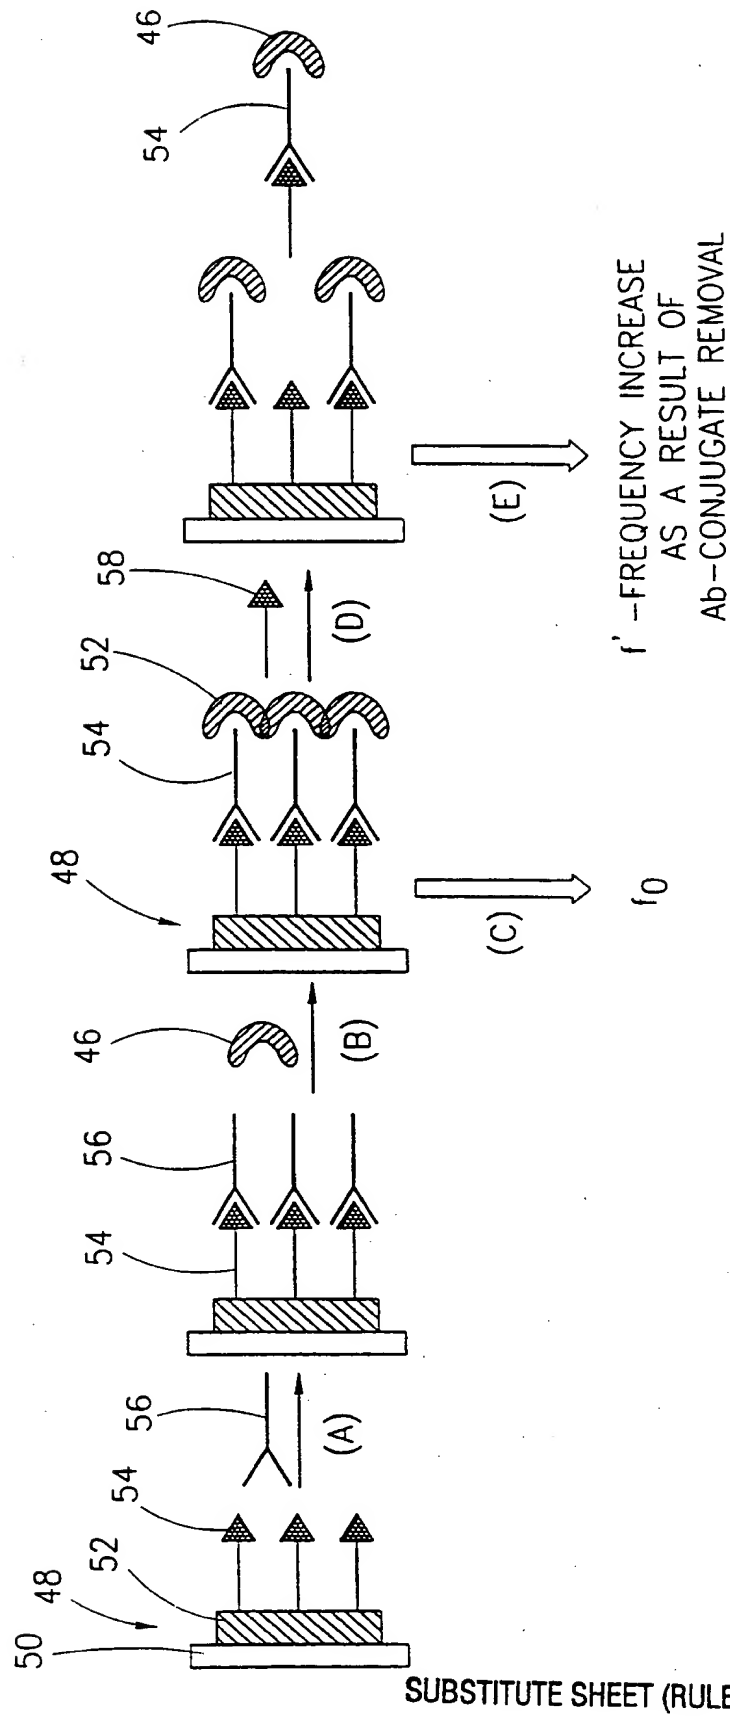



FIG. 5

SUBSTITUTE SHEET (RULE 26)



6/22

FIG. 6

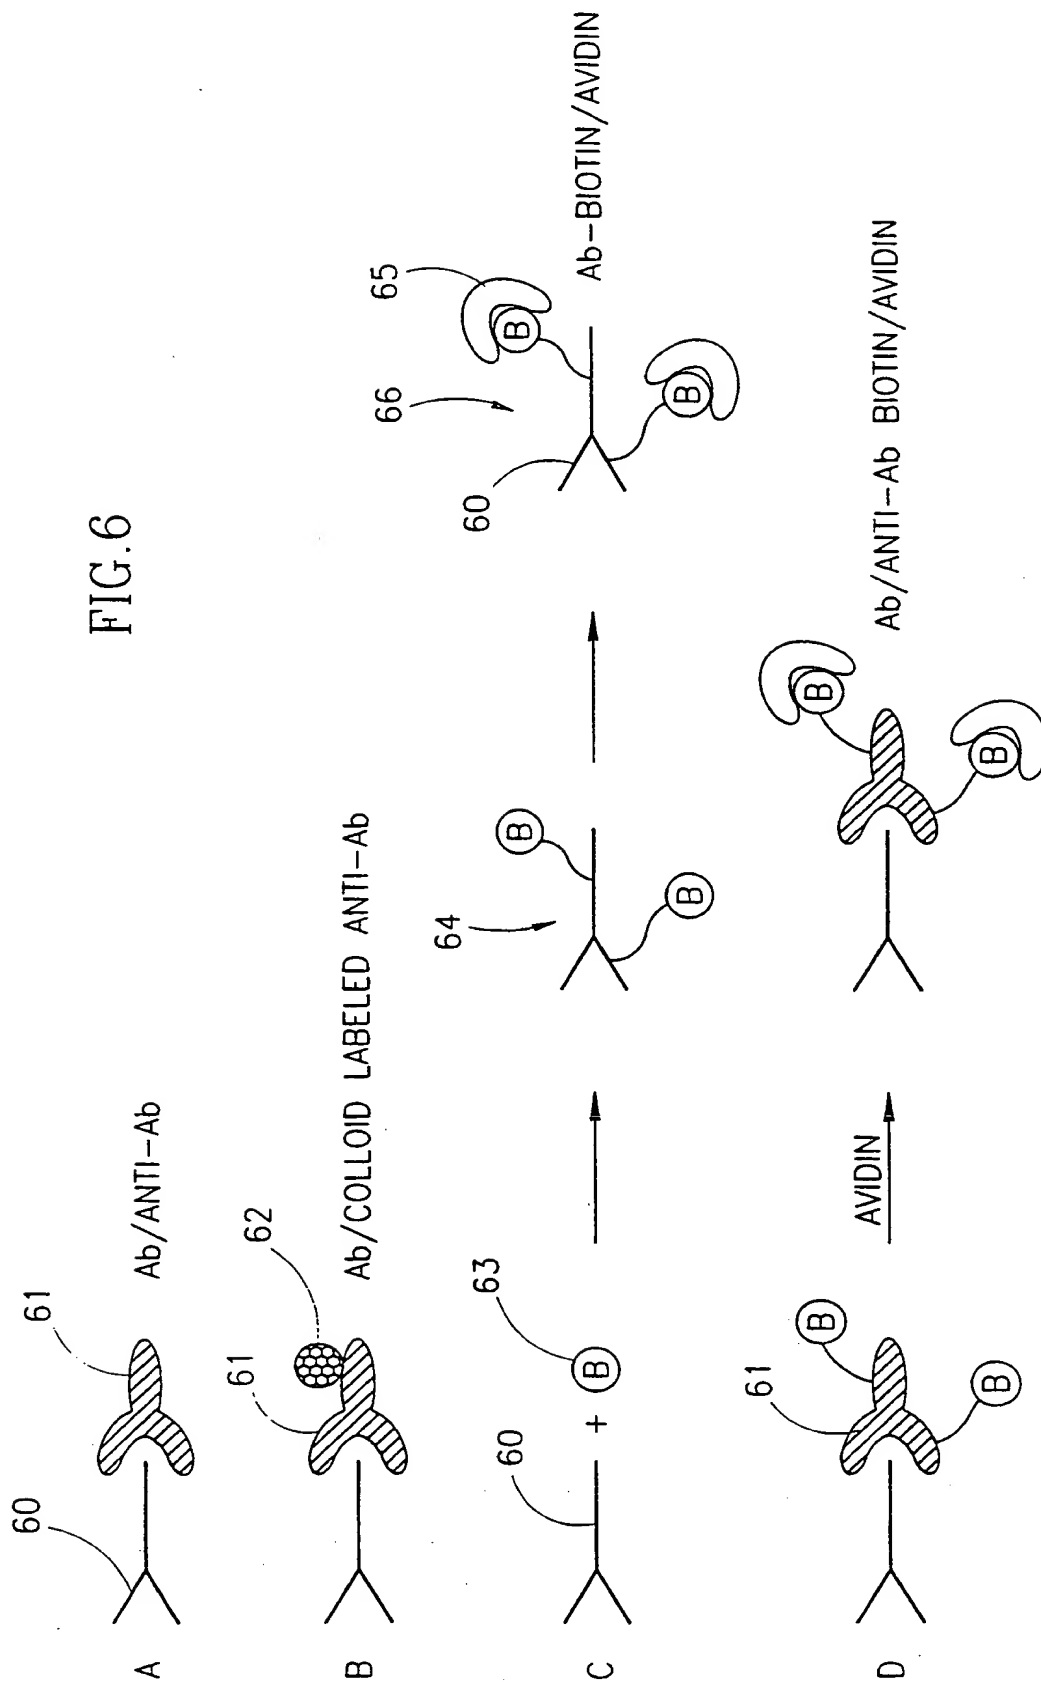

7/22

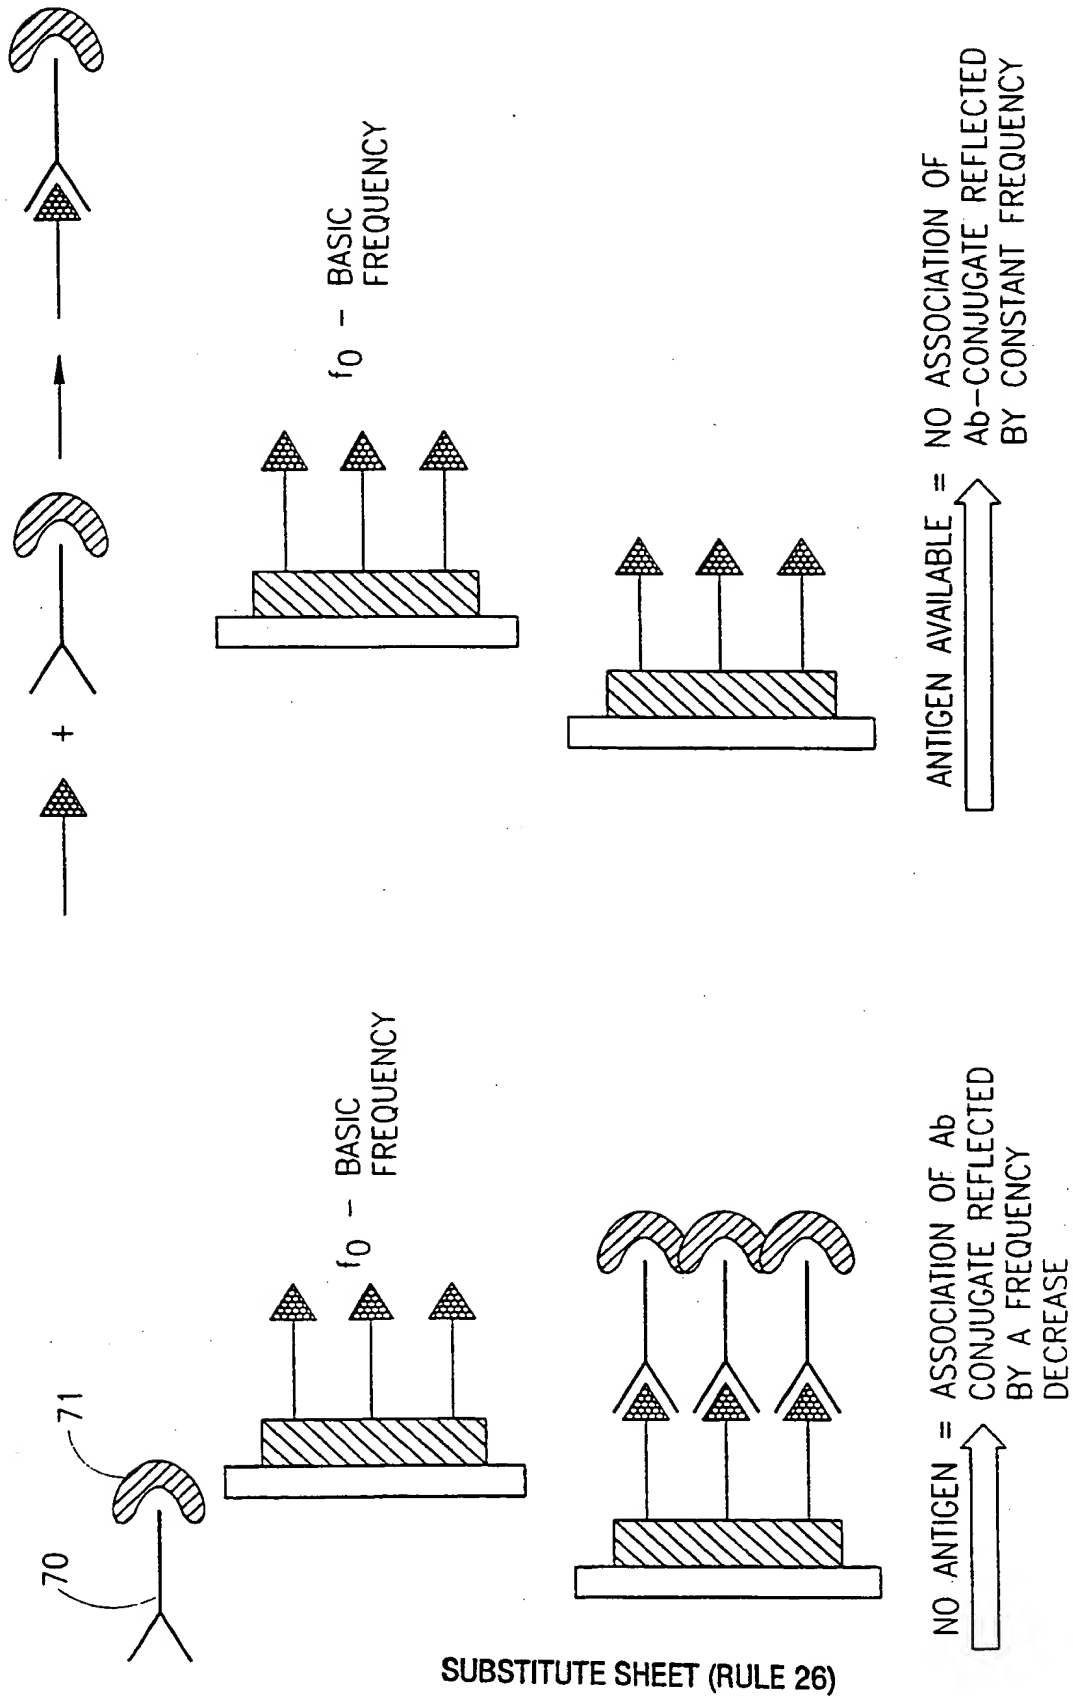


FIG.7

SUBSTITUTE SHEET (RULE 26)

8/22

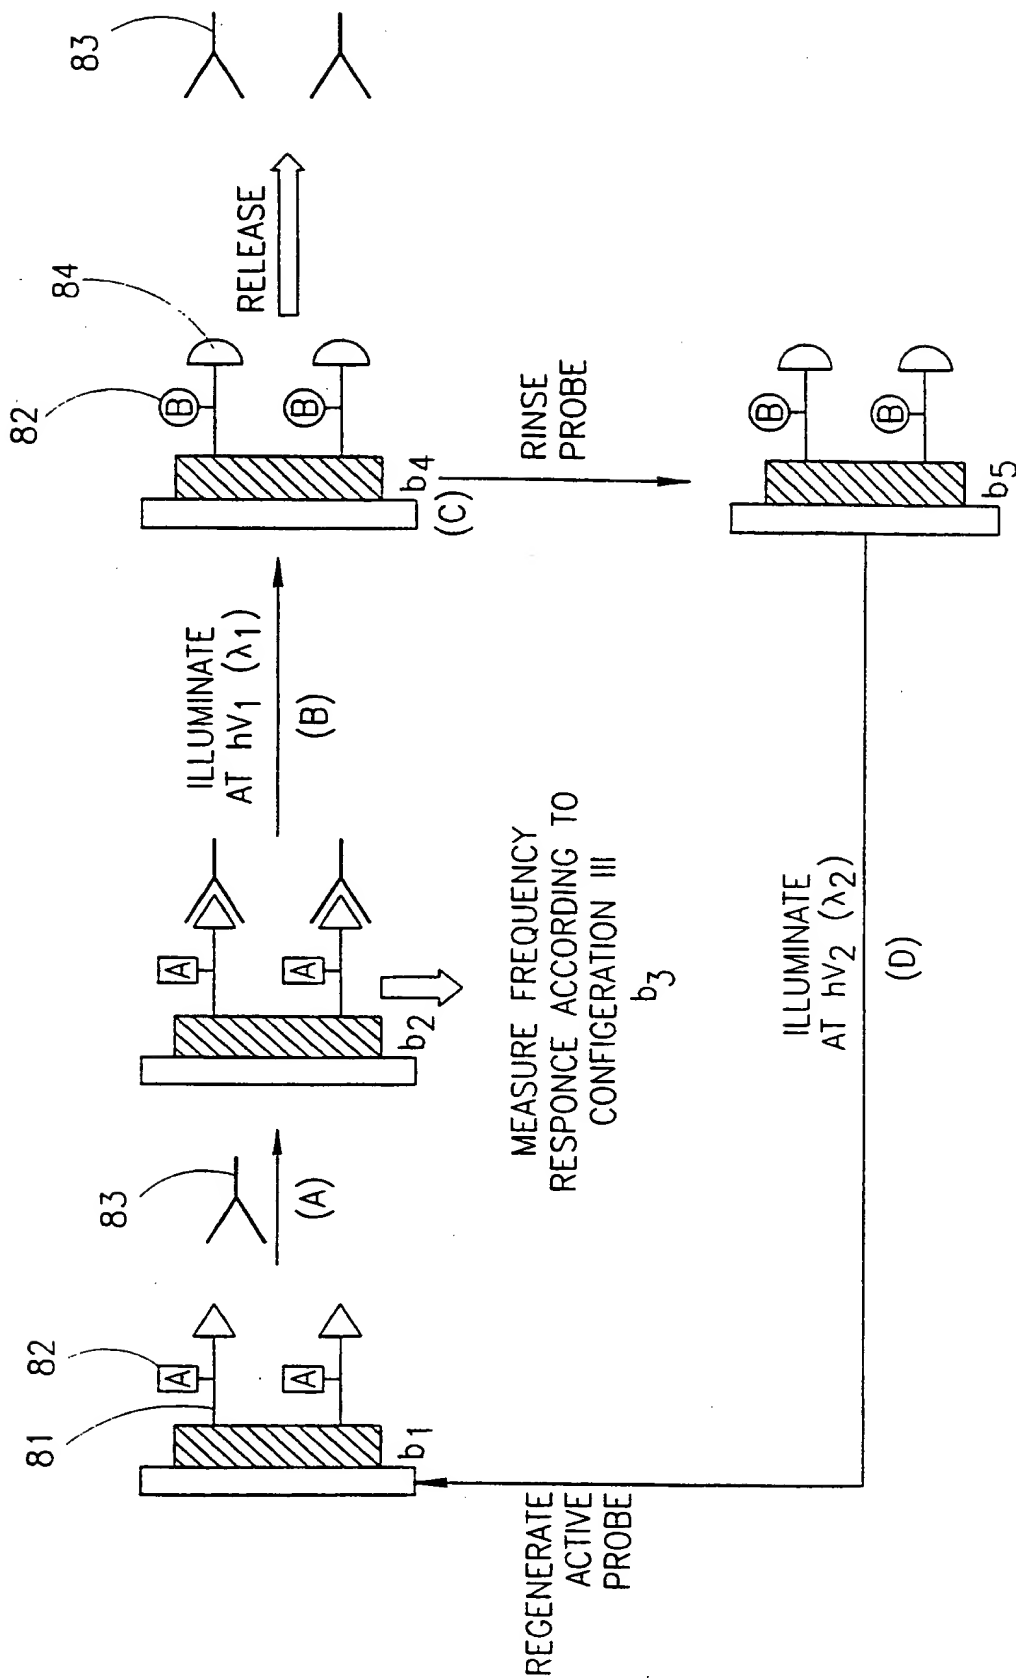


FIG.8

9/22







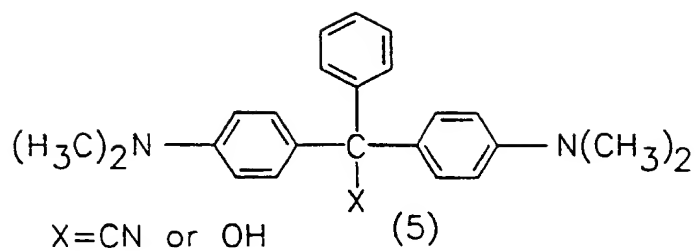


FIG.9

10/22

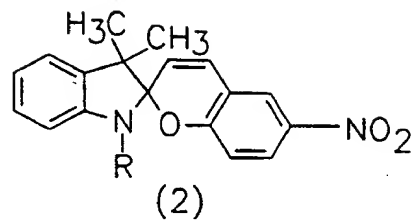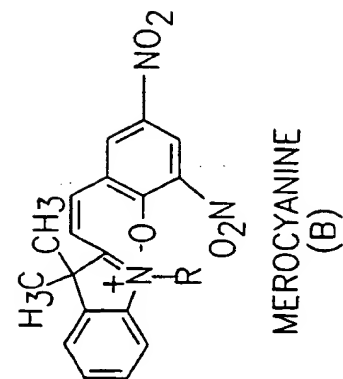

(9)


(9A) R = -CH<sub>3</sub>

FIG.9 (CONT.)

SUBSTITUTE SHEET (RULE 26)

11/22

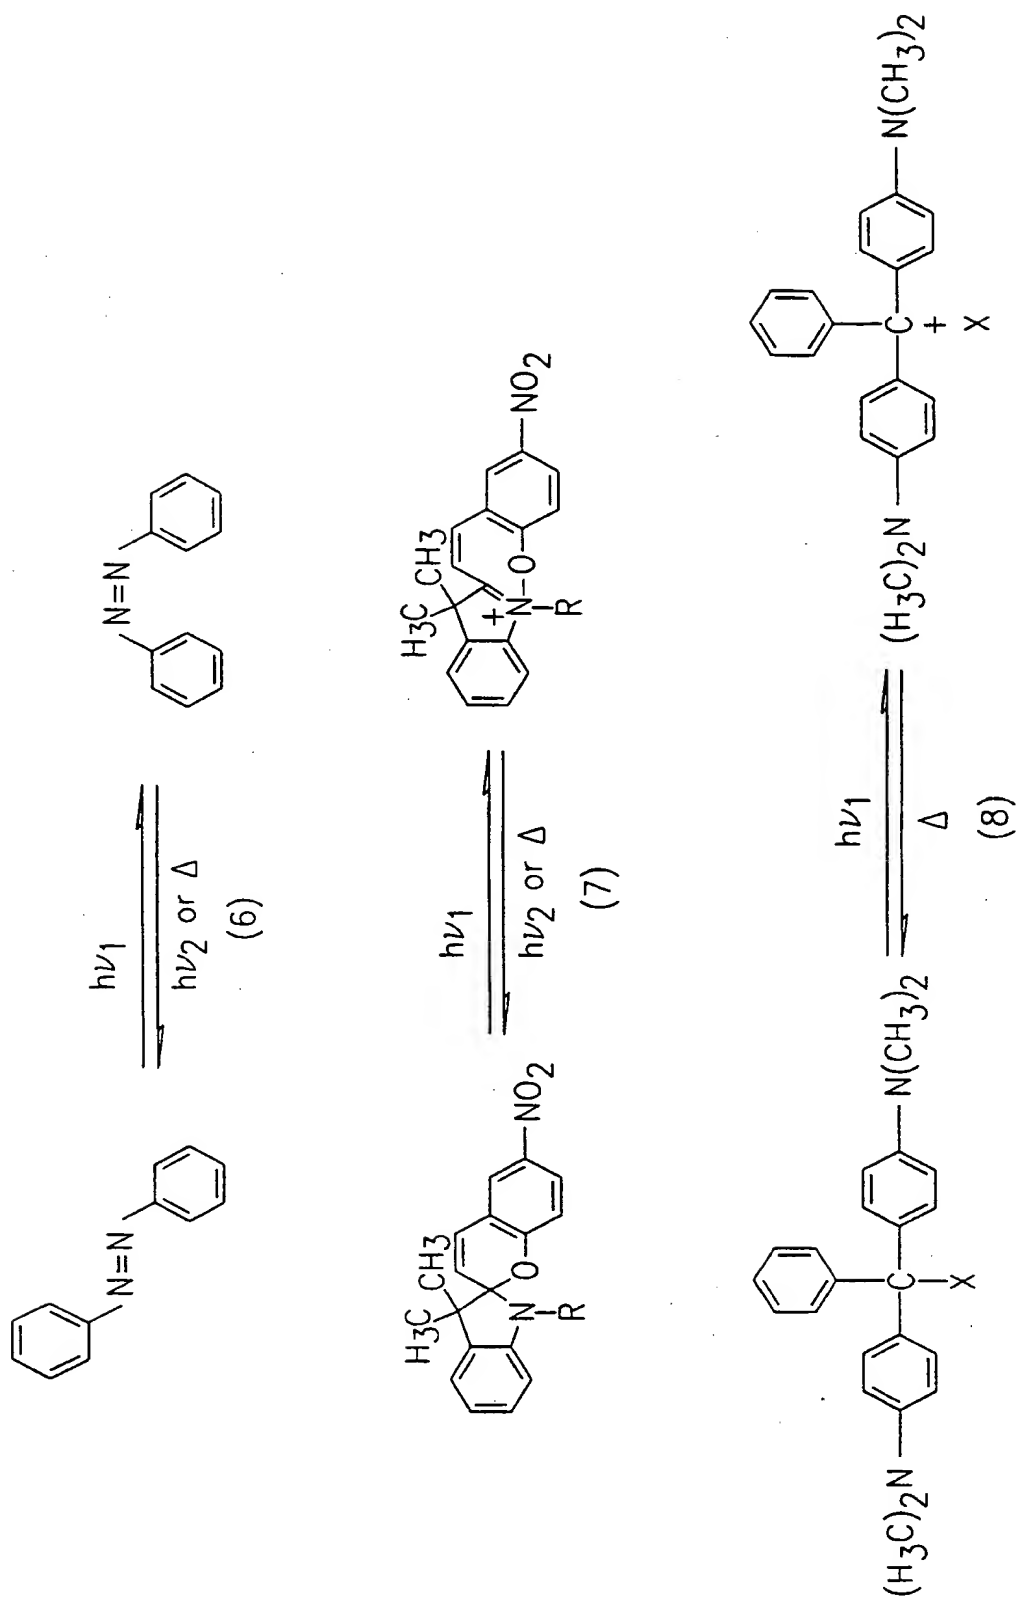


FIG. 9 (CONT.)

12/22

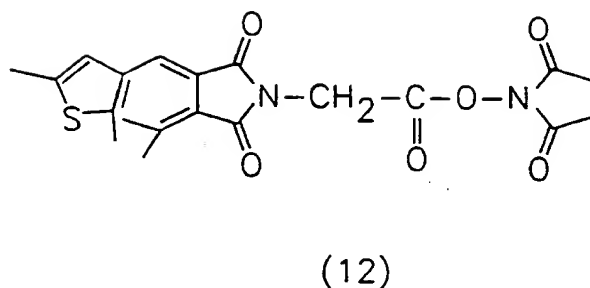
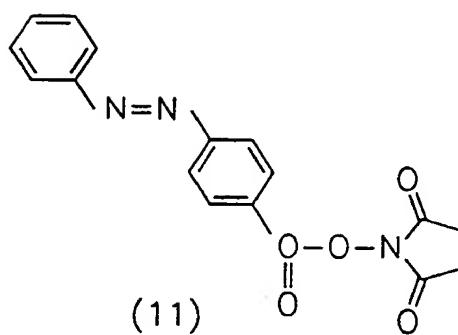
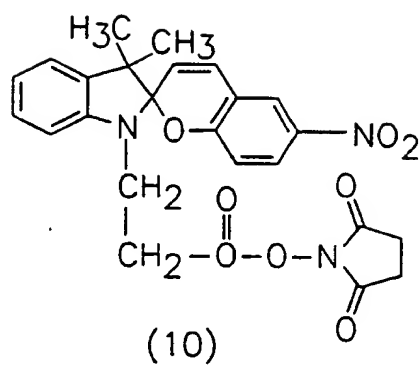


FIG.9 (CONT.)

SUBSTITUTE SHEET (RULE 26)

13/22

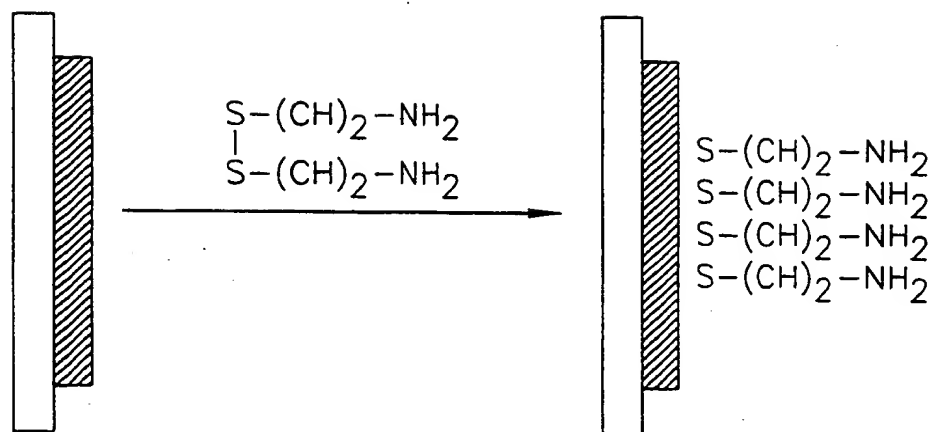


FIG.10

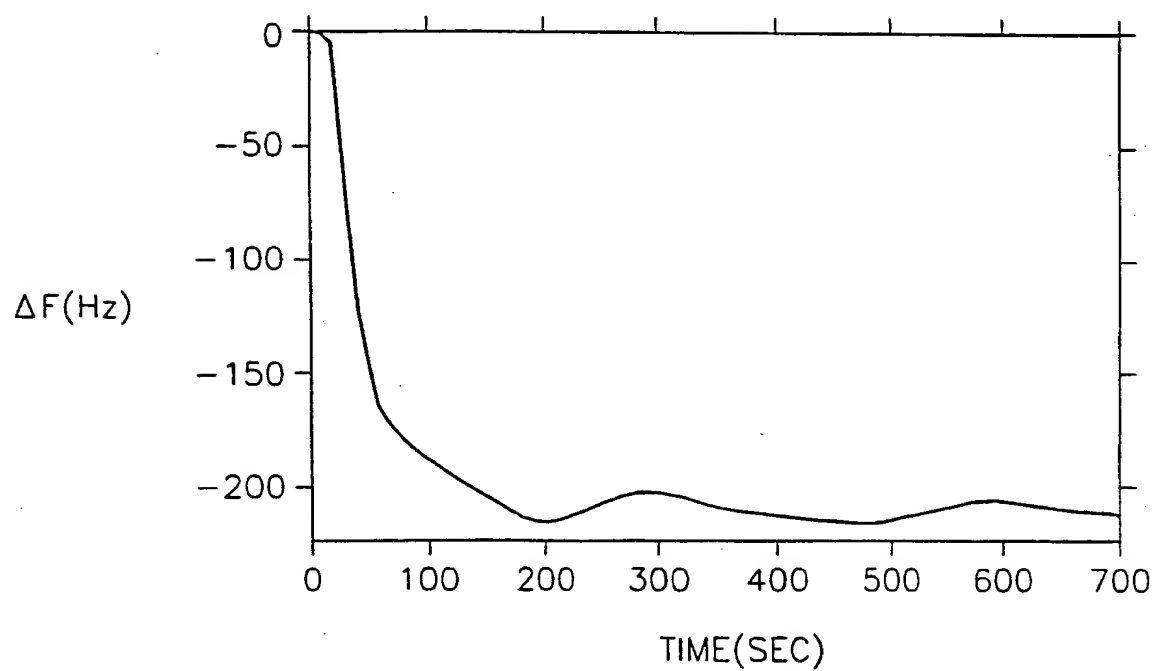


FIG.11

SUBSTITUTE SHEET (RULE 26)



14/22

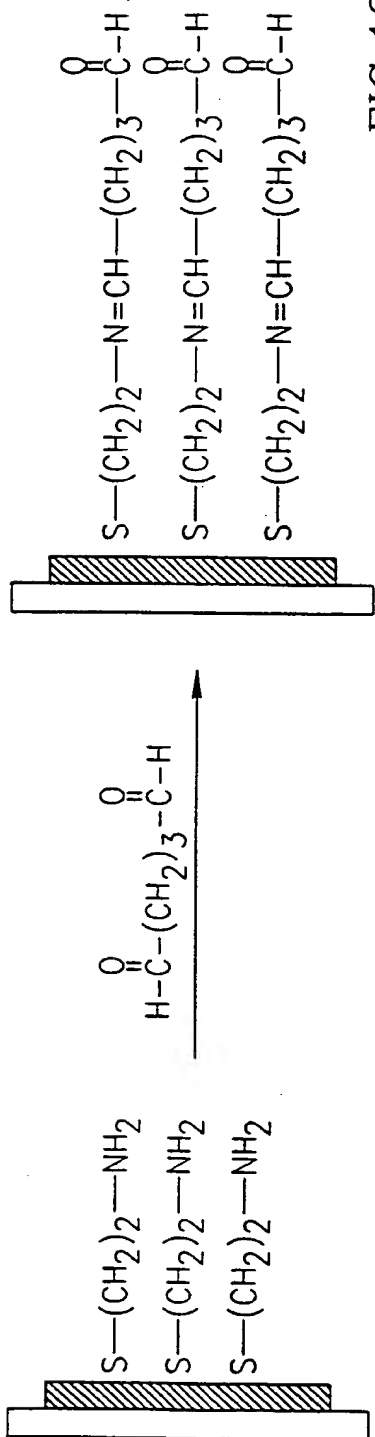


FIG. 12

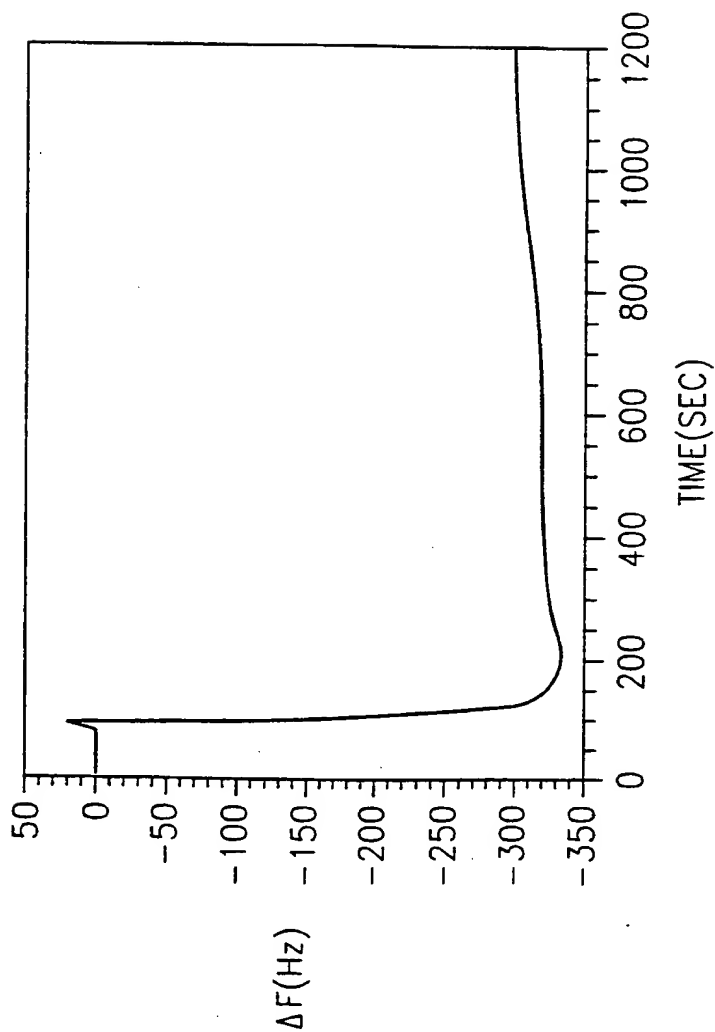


FIG. 13

15/22

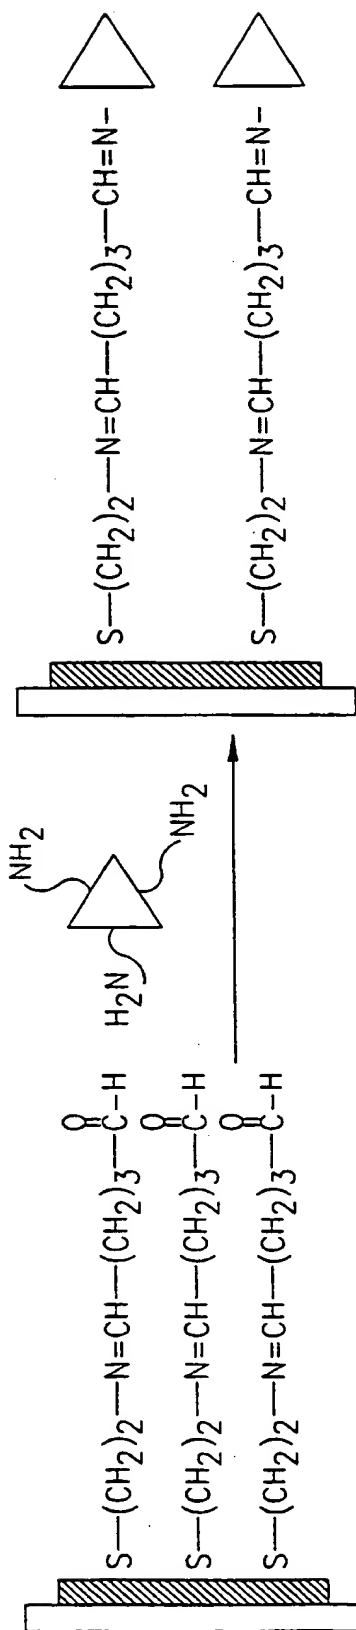


FIG. 14

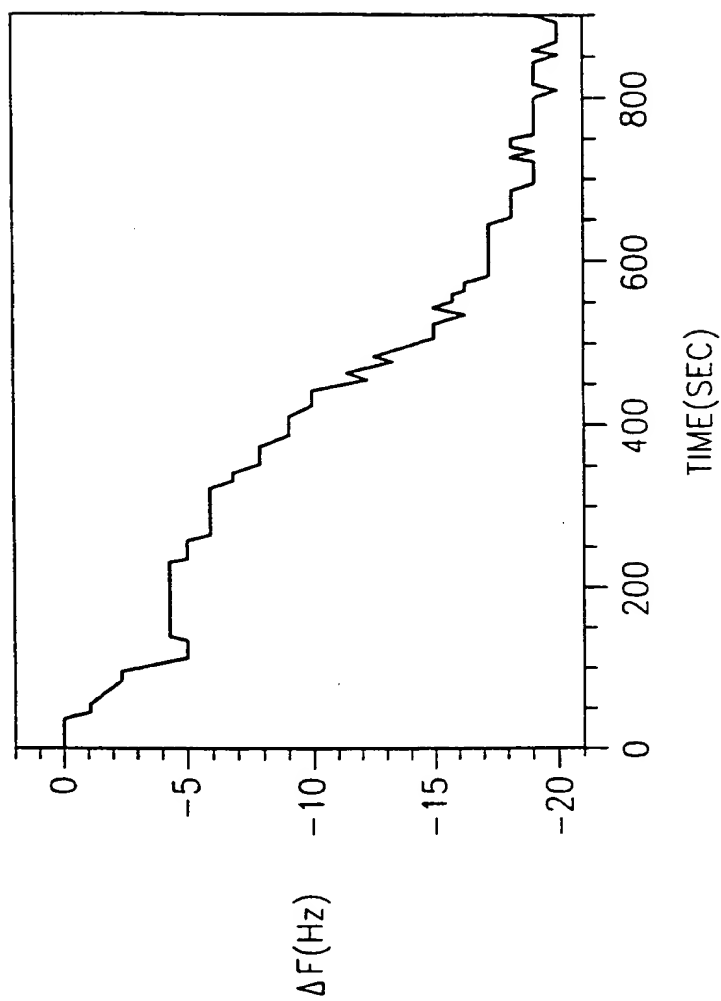


FIG. 15

16/22

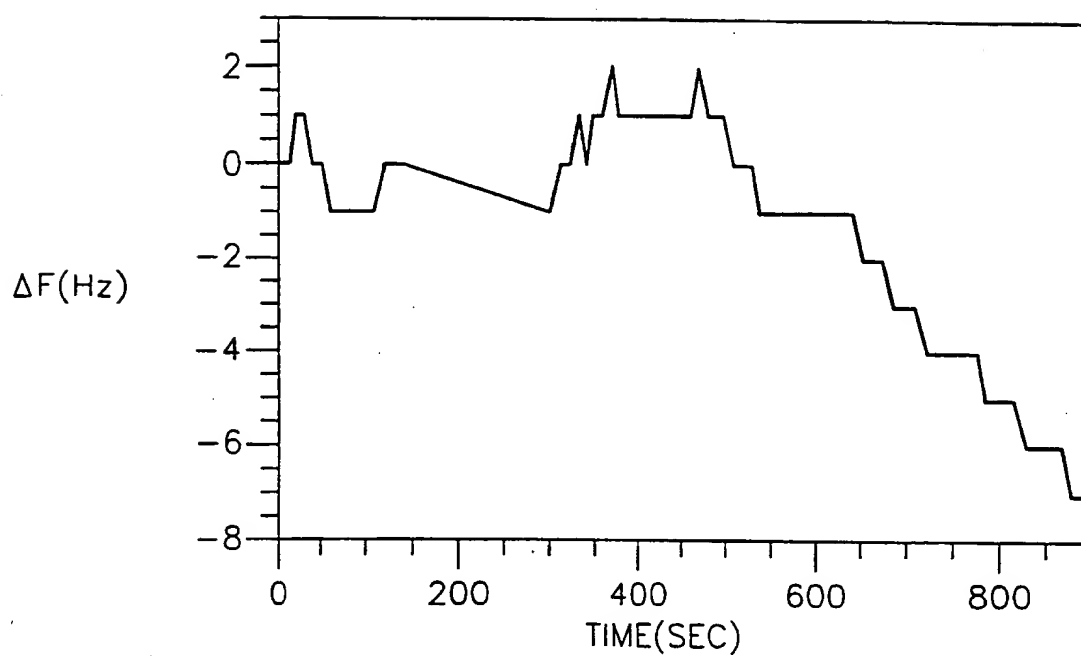


FIG.16

SUBSTITUTE SHEET (RULE 26)

17/22

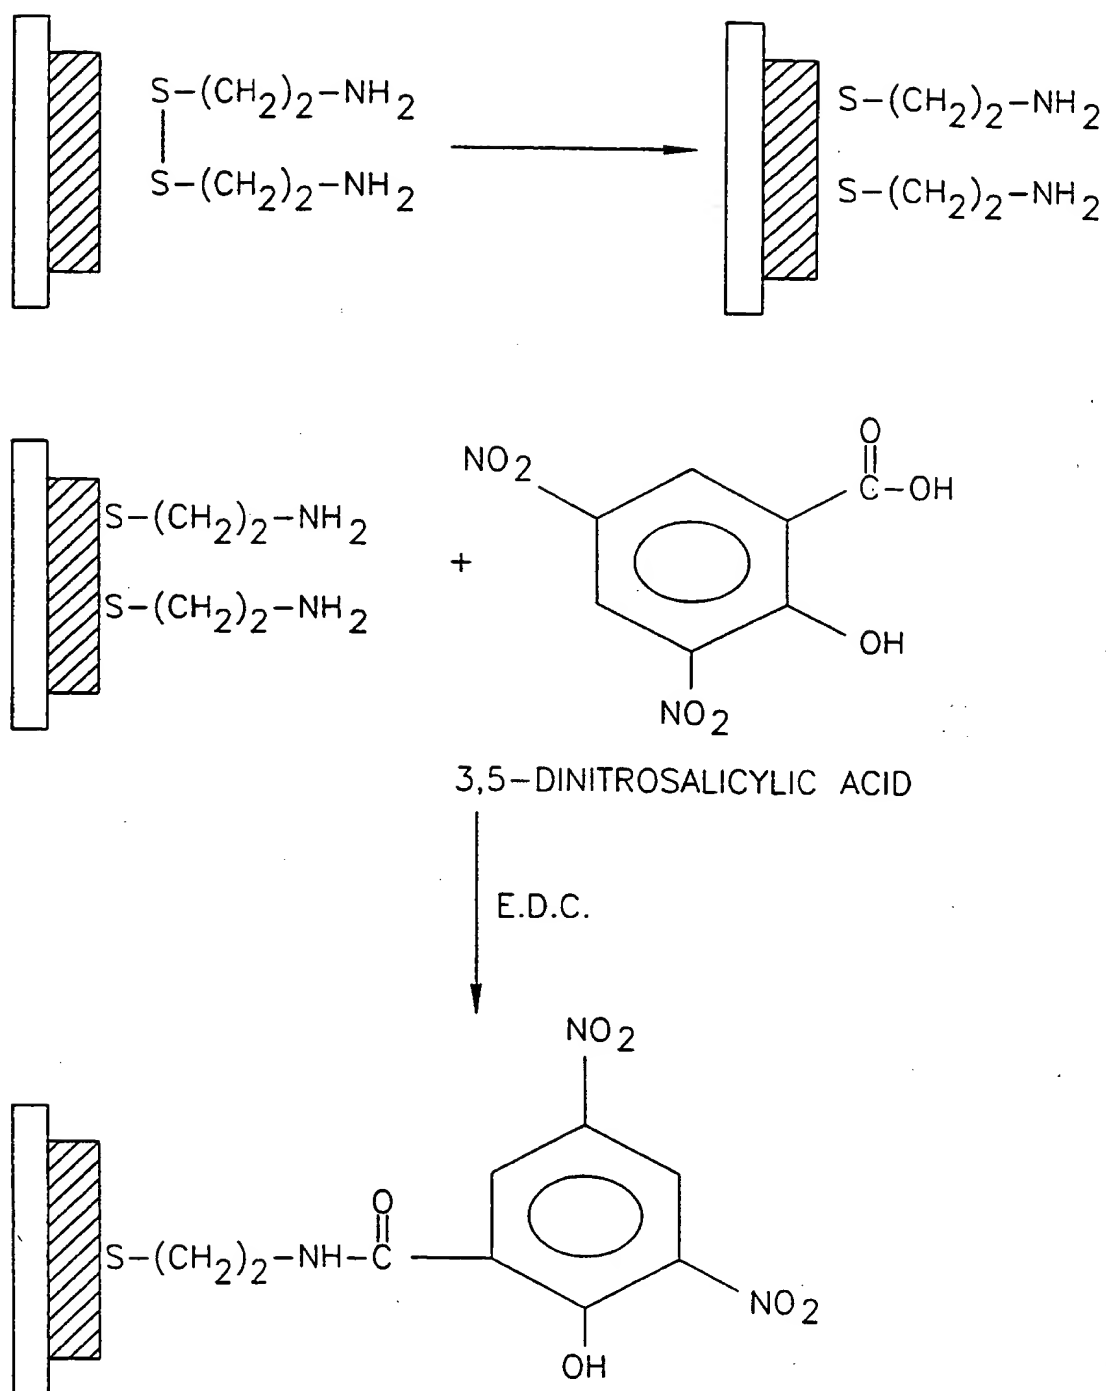


FIG.17

18/22

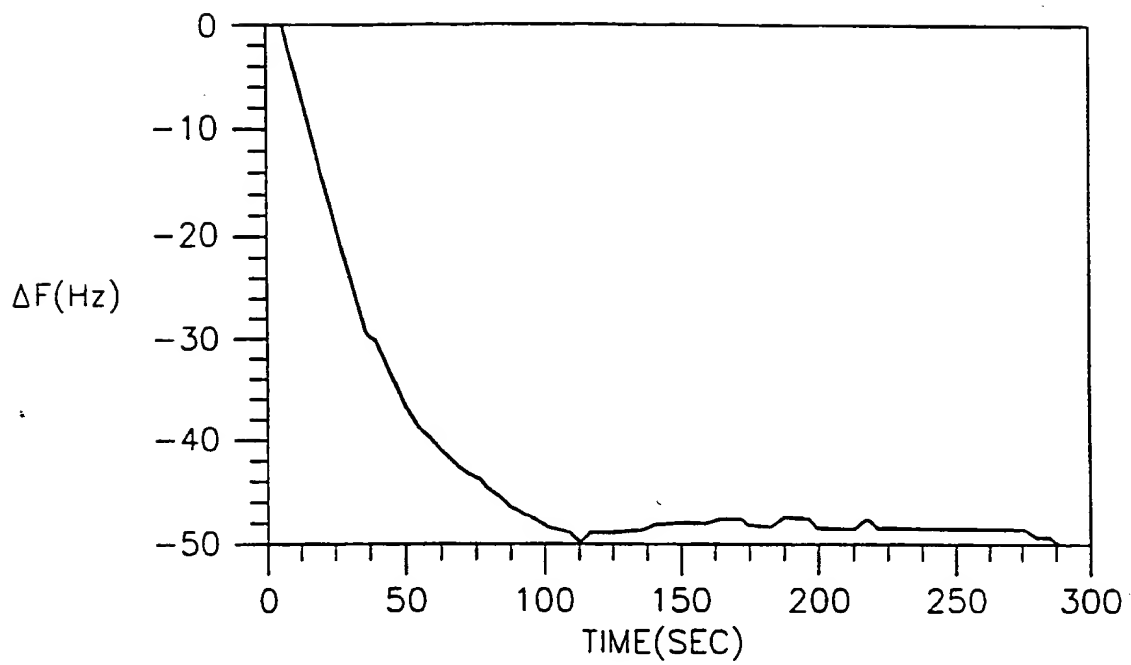


FIG. 18

SUBSTITUTE SHEET (RULE 26)

19/22

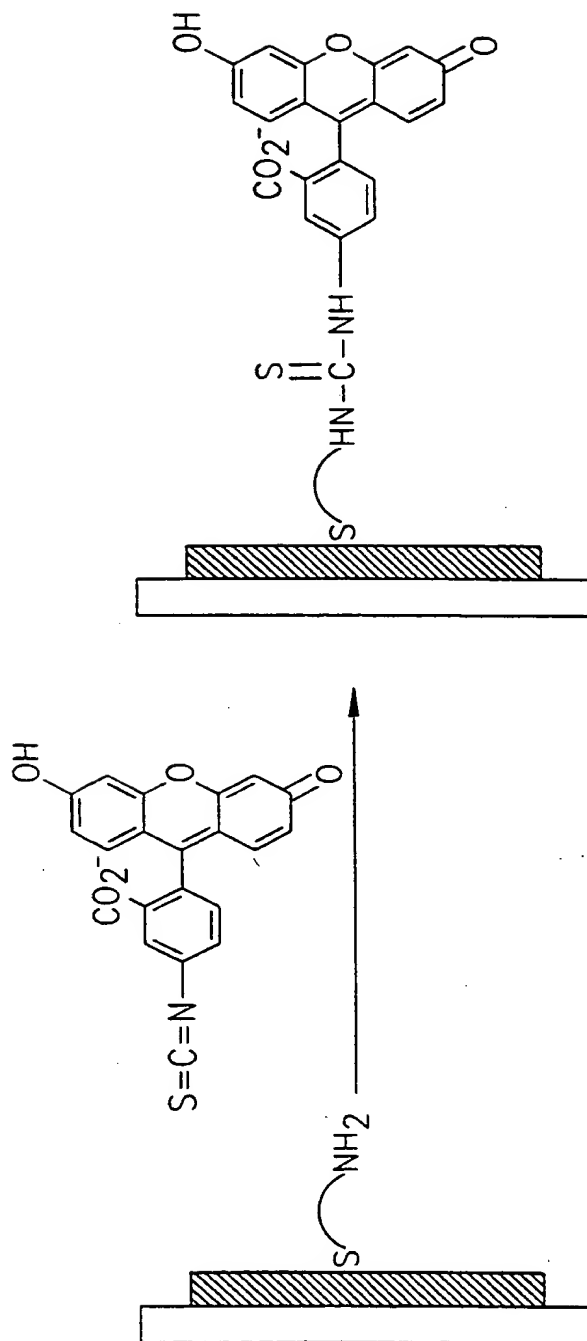


FIG.19

20/22

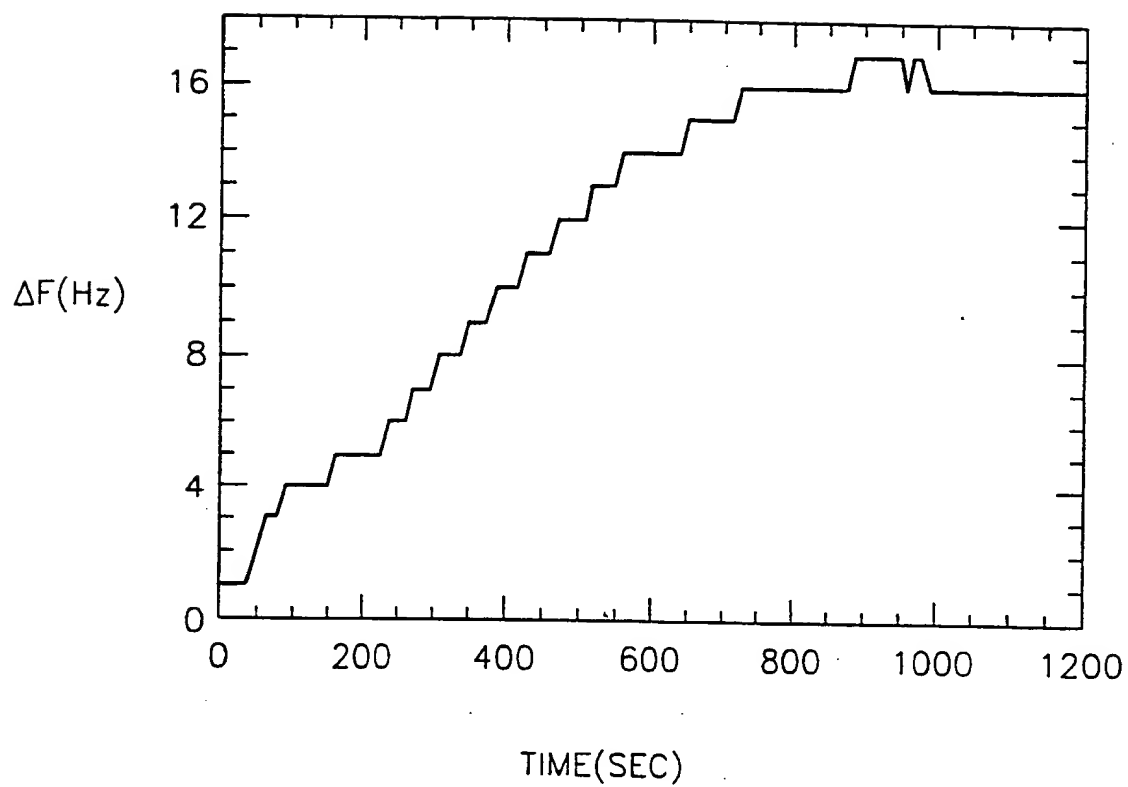


FIG.20

21/22

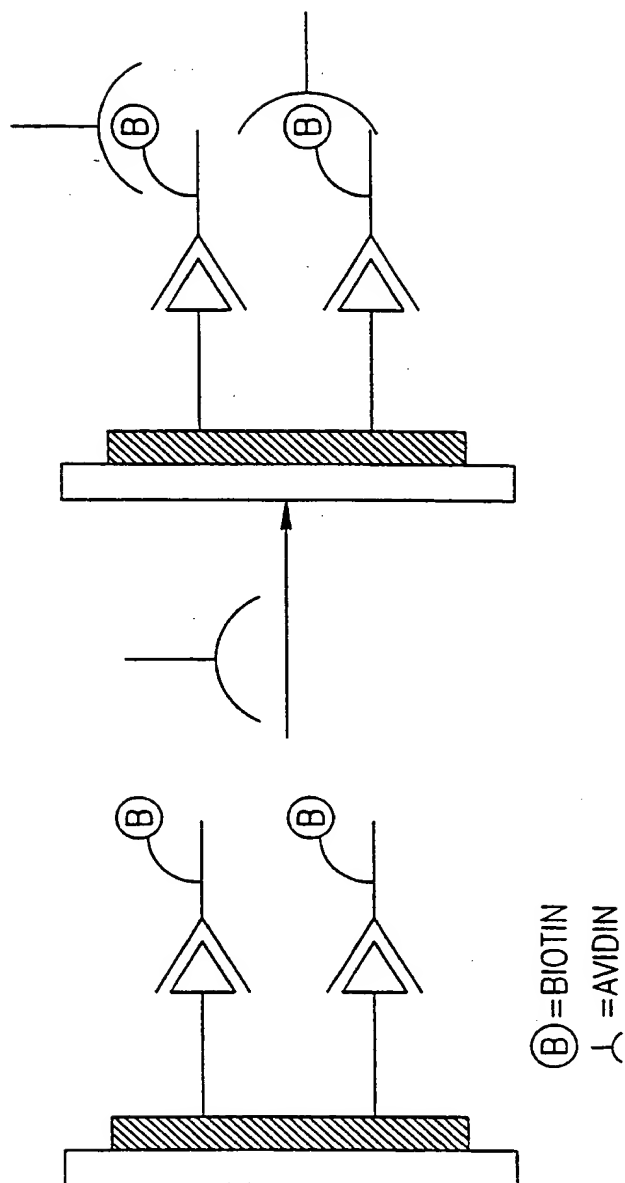


FIG.21



22/22

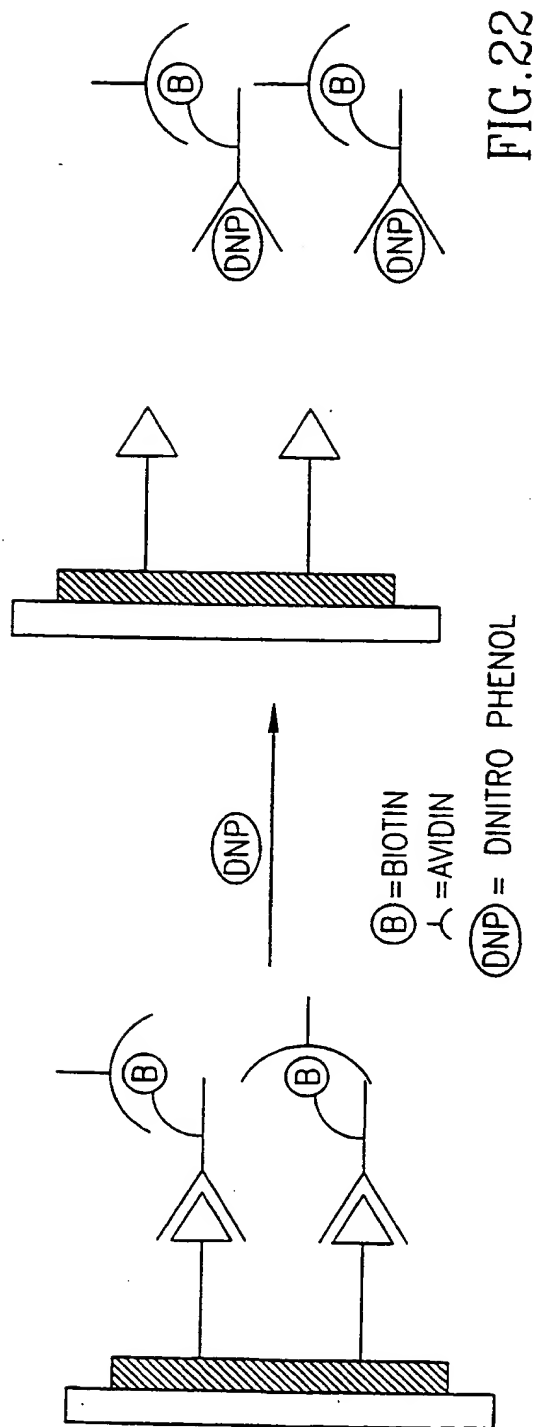


FIG.22

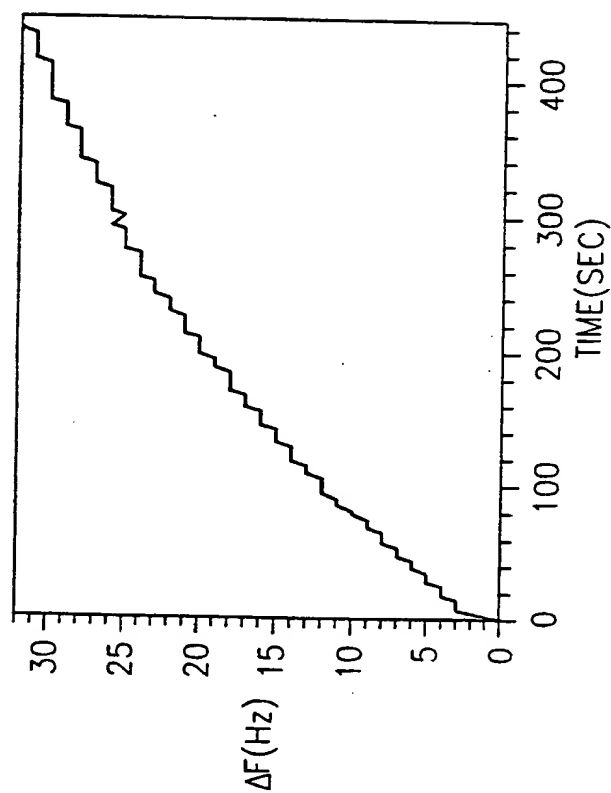


FIG.23

SUBSTITUTE SHEET (RULE 26)






## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification 6 :</b> <b>G01N 33/543</b>	<b>A3</b>	<b>(11) International Publication Number:</b> <b>WO 97/04314</b> <b>(43) International Publication Date:</b> 6 February 1997 (06.02.97)
<b>(21) International Application Number:</b> PCT/IL96/00049 <b>(22) International Filing Date:</b> 16 July 1996 (16.07.96) <b>(30) Priority Data:</b> 114692                      21 July 1995 (21.07.95)                      IL <b>(71) Applicant (for all designated States except US):</b> YISSUM RESEARCH DEVELOPMENT COMPANY OF THE HEBREW UNIVERSITY OF JERUSALEM [IL/IL]; 46 Jabotinsky Street, 92182 Jerusalem (IL). <b>(72) Inventors; and</b> <b>(75) Inventors/Applicants (for US only):</b> WILLNER, Itamar [IL/IL]; 12 HaShalom Street, 90805 Mevasseret Zion (IL). LEVI, Shlomo [IL/IL]; 128 HaPalmach Street, 90805 Mevasseret Zion (IL). COHEN, Yael [IL/IL]; 128 HaPalmach Street, 90805 Mevasseret Zion (IL). KATZ, Eugenii [IL/IL]; Neve Yaakov 713/38, 97350 Jerusalem (IL). DAGAN, Arie [IL/IL]; 13 Harlap Street, 92341 Jerusalem (IL). <b>(74) Agent:</b> COHN, Ilan; Reinhold Cohn and Partners, P.O. Box 4060, 61040 Tel Aviv (IL).		<b>(81) Designated States:</b> AL, AM, AT, AU, AZ, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, US, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). <b>Published</b> <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i> <b>(88) Date of publication of the international search report:</b> 22 May 1997 (22.05.97)

(54) Title: DETERMINATION OF AN ANALYTE IN A LIQUID MEDIUM

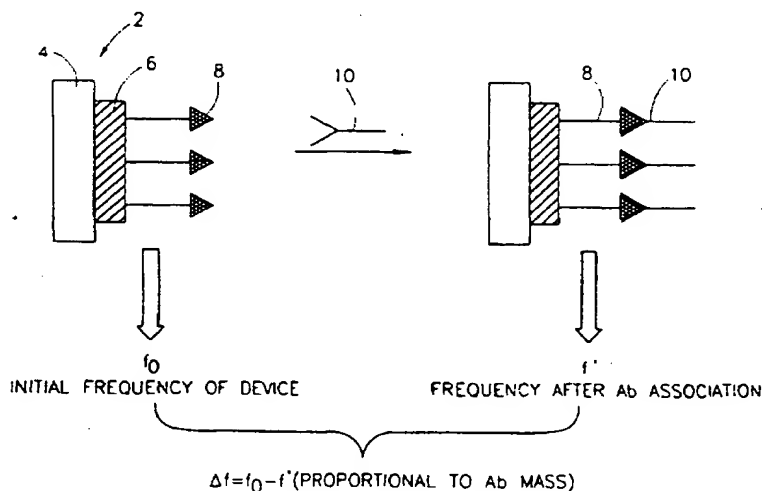

## (57) Abstract

Binding between two members of a recognition pair, e.g. antigen-antibody is determined by utilizing a probe comprising a piezoelectric crystal with electrodes on two opposite faces of the crystal. The crystal carries one or more metal plates which may be the same or different than said electrodes, the metal plates having immobilized thereon a first member of a recognition pair. Binding of a second member of the recognition pair to the first member, or dissociation between the two members and release of the second member from the probe, causes a change of immobilized mass which results in a change to the probe's resonance frequency. Said immobilized members may be immobilized on the surface of said metal plates by means of a linking group, having the following general (I):  $Z-R^1-Q$  wherein Z represents a sulphur-containing moiety which is capable of chemical association with, attachment to or chemisorption onto said metal,  $R^1$  represents a connecting group; Q is a functional group which is capable of forming a covalent bond with a moiety of said first member of the recognition pair. The immobilized member may have or be linked to an isomerizable group which changes its isomerization state as a result of exposure to energy.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

# INTERNATIONAL SEARCH REPORT

Internu 1 Application No  
/IL 96/00049

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 6 G01N33/543

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
IPC 6 G01N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
P,X	<p>BIOSSENS. BIOELECTRON. (1996), 11(6/7), 591-598 CODEN: BB10E4;ISSN: 0956-5663, 1996, XP000612767 RICKERT, JAN ET AL: "A new affinity biosensor: self-assembled thiols as selective monolayer coatings of quartz crystal microbalances" see the whole document</p>	<p>1,2,6-8, 10,12, 13,17</p>
P,Y	<p>EP 0 668 502 A (YISSUM RES DEV CO) 23 August 1995 see the whole document</p>	<p>3-5,11, 14-16,18</p>

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### \* Special categories of cited documents :

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*&\* document member of the same patent family

Date of the actual completion of the international search

17 December 1996

Date of mailing of the international search report

04-04-1997

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+ 31-70) 340-2040, Tx. 31 651 epo nl,  
Fax (+ 31-70) 340-3016

Authorized officer

Wells, A

# INTERNATIONAL SEARCH REPORT

Intern: 1 Application, No  
/IL 96/00049

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	THIN SOLID FILMS, vol. 260, no. 2, 15 May 1995, pages 192-199, XP000511908 GEDDES N J ET AL: "SURFACE CHEMICAL ACTIVATION OF QUARTZ CRYSTAL MICROBALANCE GOLD ELECTRODES - ANALYSING BY FREQUENCY CHANGES, CONTACT ANGLE MEASUREMENTS AND GRAZING ANGLE FTIR"	1,2,6-8, 10,12, 13,17
Y	see the whole document	3-5,11, 14-16,18
X	--- WO 94 02852 A (DU PONT) 3 February 1994 see page 32, line 25 - line 32; examples 4-6	1,6-8,12
X	--- WO 89 09937 A (DU PONT) 19 October 1989 see figures 7,8; table 3	1,6-8,12
X	--- WO 91 05261 A (DU PONT) 18 April 1991	1,2,6-8, 10,12, 13,17
Y	see page 33, line 15 - line 23; claim 1	3-5,11, 14-16,18
Y	--- J. AM. CHEM. SOC. (1993), 115(11), 4937-8 CODEN: JACSAT;ISSN: 0002-7863, 1993, XP002020933 WILLNER, ITAMAR ET AL: "Photoregulated binding of spiropyran-modified concanavalin A to monosaccharide-functionalized self-assembled monolayers on gold electrodes" see the whole document	3-5,11, 14-16,18
Y	--- J. AM. CHEM. SOC. (1994), 116(20), 9365-6 CODEN: JACSAT;ISSN: 0002-7863, 1994, XP002020934 WILLNER, ITAMAR ET AL: "Application of Photoisomerizable Antigenic Monolayer Electrodes as Reversible Amperometric Immunosensors" see the whole document -----	3-5,11, 14-16,18

# INTERNATIONAL SEARCH REPORT

International application No.

PCT/IL 96/00049

## Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:  
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☐ Claims Nos.:  
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:
3. ☐ Claims Nos.:  
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

## Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet).

This International Searching Authority found multiple inventions in this international application, as follows:

See annex.

1. ☐ As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☒ No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

1-7, 8 (in part), 10-18

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
- ☐ No protest accompanied the payment of additional search fees.

# INTERNATIONAL SEARCH REPORT

International Application No. PCT/IL 96/ 00049

FURTHER INFORMATION CONTINUED FROM PCT/ISA/210

- 1 . Claims 1-7, 8 (in part) : Systems, methods and probes using piezoelectric  
10-18 : devices with treated electrodes for binding  
: non-aqueous analytes.
- 2 . Claims 8 (in part), 9 : Method using a piezoelectric device for binding  
: analyte molecules which are a priori suspended  
: or dissolved in a gas.



# INTERNATIONAL SEARCH REPORT

Information on patent family members

Intern: J Application No

IL 96/00049

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0668502 A	23-08-95	JP 7301615 A	14-11-95
WO 9402852 A	03-02-94	CA 2139242 A	03-02-94
		EP 0650598 A	03-05-95
		JP 7509264 T	12-10-95
WO 8909937 A	19-10-89	US 4999284 A	12-03-91
		CA 1332221 A	04-10-94
		DE 68916423 D	28-07-94
		DE 68916423 T	24-11-94
		EP 0408578 A	23-01-91
		JP 3503567 T	08-08-91
WO 9105261 A	18-04-91	CA 2066643 A	05-04-91
		DE 69010506 D	11-08-94
		DE 69010506 T	22-12-94
		EP 0494896 A	22-07-92
		JP 5500715 T	12-02-93

**THIS PAGE BLANK (USPTO)**